

Job Name : _____
 Purchaser : _____
 Engineer : _____
 Submitted To : _____
 Submitted By : _____
 Unit Designation : Schedule No.: _____

Location : _____
 P.O. No. : _____
 Architect : _____
 Date : _____
 For : Reference Approval Construction
 Model No.: _____

Submittal Data : LC340CP

**Air Conditioner
 Single Zone Ceiling Cassette**



Capacities :

Rated Cooling Capacity (Btu/h)	34,000/33,500
SEER	13.0
EER	11.0

Cooling Nominal Test Condition :
 Indoor : 80 DB / 67 WB
 Outdoor : 95 DB / 75 WB
 Pipe Length : 25ft

Indoor Unit :

Power Supply (V,Ph,Hz)	230/280,1,60
Minimum Circuit Ampacity (A)	Powered by outdoor unit
Maximum Overcurrent Protection (A)	Powered by outdoor unit
Weight (lbs)	57.3
Sound Pressure (dB(A), H/M/L Cool, 4.9ft front)	40/37/34
Air Circulation (CFM, H/M/L Cool)	850/800/750
Dehumidification (pts/hr)	7.8
Drain Pipe (inches, O.D)	3/8

Front Panel Assembly : PT-CDC1

Weight (lbs)	6.6
--------------	-----

Outdoor Unit :

Power Supply (V,Ph,Hz)	230/208,1,60
Minimum Circuit Ampacity (A)	30
Maximum Overcurrent Protection (A)	40
Running Current (A)	11.5/16.5
Weight (lbs)	190.0
Sound Pressure (dB(A), High Cool, 3.3ft front)	58

Refrigerant Piping :

Maximum Length (ft)	115
Maximum Height Difference (ft)	65
Liquid Side (inches, O.D)	1/4
Gas Side (inches, O.D)	5/8
Refrigerant	R410A

Operating Range :



Cooling Operating Range (, standard)	23 - 115
Cooling Operating Range (, w/Low ambient kit)	0 - 115

Standard Features :



- Five Year Compressor Warranty
- Two Year Functional Parts Warranty
- Multi Power System™
- Built-in Condensate Pump
- Plasma Air Purifying System
- 4 way Cooling
- Swirl Wind Air Circulation
- Wireless Remote Controller
- Auto Restart
- 24 Hour On/Off Timer
- Temperature Display on Wired Wall Thermostat and LCD Wireless Remote Controller

Note :

LCN340CP

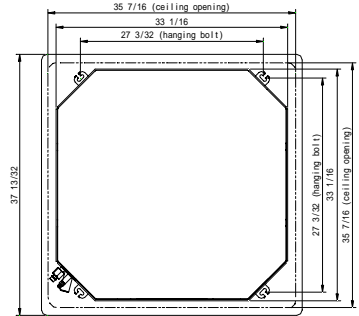

PT-CDC1

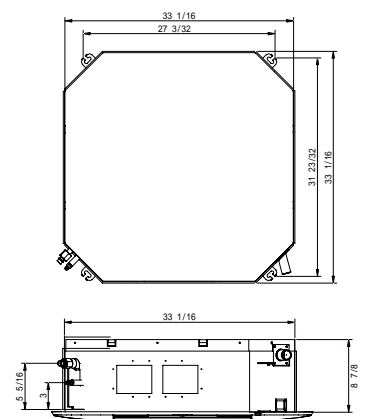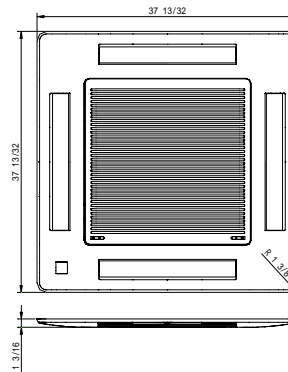

LCU340CP

