



Everything'Stat®



COMPATIBLE WITH:

- Most 24v Gas, Oil, Electric Heating and Air Conditioning Systems
- Multi-stage Heat Pumps
- 2 Wire Hydronic Systems
- Hydronic Air Handlers
- Millivolt Systems

NOT COMPATIBLE WITH:


- 3 Wire Hydronic Systems
- Line Voltage Systems (Without Transformer)

PSP722E 2H/2C DIGITAL PROGRAMMABLE THERMOSTAT

- **Universal Compatibility Everything'Stat®**
- **Controls up to 2 Stages of Heat and 2 Stages of Cooling Plus Auxiliary and Emergency Heat**
- **Auto Changeover**
- **Large Hybrid Dot Matrix Display**
- **Auxiliary and Emergency Heat Indicators**
- **EL (Electro Luminescent) Backlight**
- **IAQ Independently Programmable Fan**
- **7 Day Programming**
- **Default ENERGY STAR Approved Program**
- **4 Periods Per Day**
- **Temporary Override**
- **Hold**
- **Vacation Hold**
- **Optional Smart Recovery**
- **ENERGY STAR Compliant**
- **Programmable Filter Timer with Change Filter Indicator**
- **Energy Usage Monitor**
- **Fahrenheit or Celsius Temperature Display**
- **12/24 Hour Clock**
- **Easy Programming with LUX Speed Dial™**
- **Advanced Copy Function for Fast Easy Programming**
- **Nonvolatile Memory for All Programs and Settings**
- **Daylight Savings Button**
- **Multimode Keyboard Lockout with User Programmable 3 Digit Code**
- **Programmable High and Low Setting Limits**
- **Defeatable Audible Button Response**
- **Menu Driven Setup Done from the Front Panel**
- **Temperature Offset (User calibration)**
- **Outdoor Temperature Sensor Capability**
- **3 Remote Indoor Sensor Capability**
- **Dual Power Capable (System/Battery)**
- **Multi-Stage Adjustable Temperature Differential/Cycle Rate**
- **Programmable Length Minimum Run Time**
- **Programmable Auto-Changeover Dead-Band**
- **Programmable Fan Delays for Heat, Cool, in Both On and Off**
- **Heat Pump Lock Out with Adjustable Disable Temperature**

LUXPRO®

PSP722E

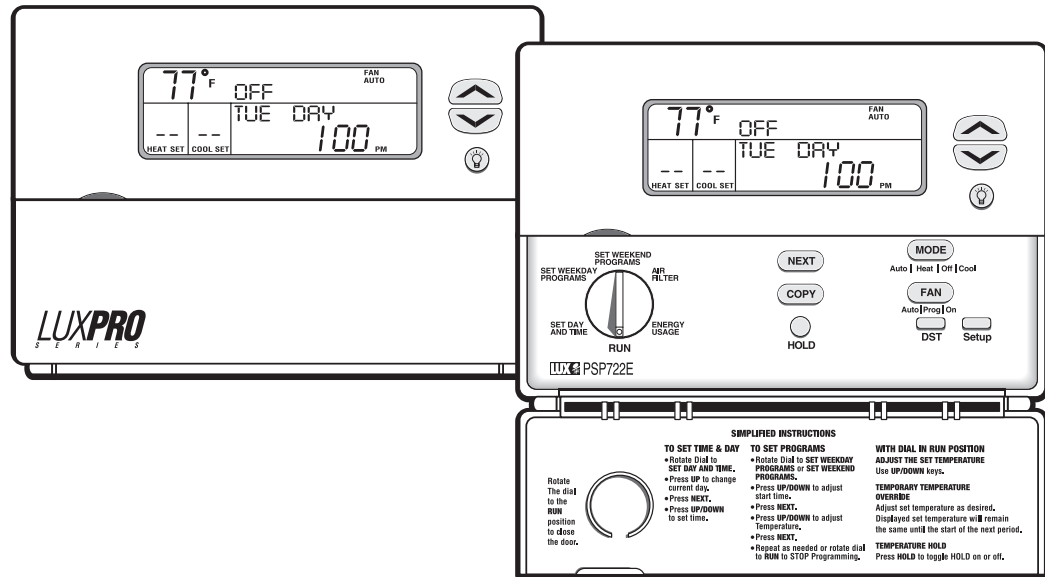

GENERAL DESCRIPTION:

6" (150mm) wide x 4³/₈" (110mm) tall x 1¹/₄" (30mm) deep

Description: Universally compatible Everything'Stat® offers programmable control of single or multistage heating and cooling systems. Temperature control adjustable.

SPECIFICATIONS:

Heat/Cool Terminals: RH, RC, O, B, W1, W2, Y1, Y2, G, E, C.

Electrical Ratings: 1¹/₂ AMPS at each terminal, 2 AMPS total 24v AC. System or Battery Powered: 2 "AA" Batteries (optional).

Temperature Control Range: 45°F to 90°F (7° to 32°). Accuracy: ±1°F over a range of 50°F to 95°F.

Environmental Limits:

Moisture and Dust: meets IP20.

Operating Humidity: 20% to 90% non-condensing.

Operating Temperature: +32°F to +95°F (+0°C to +35°C).

Storage Temperature: -4°F to +130°F (-20°C to +54°C).

Electrical Immunity: meets relevant CE specifications.

Optional Wall Plate: Decorative Wall Plate is available for thermostat.

6¹/₂" (165mm) wide x 4³/₈" (110mm) tall.



LUX Products Corporation 6000 I Commerce Parkway • Mt. Laurel, NJ 08054
(856) 234-7905 • FAX (856) 234-7825 • www.luxproproducts.com

JOB NAME: _____

DATE: _____

CONTRACTOR: _____

UNIT DESIGNATION: _____

ENGINEER: _____

MODEL NO.: _____

SUBMITTED FOR: APPROVAL RECORD

LOCATION: _____