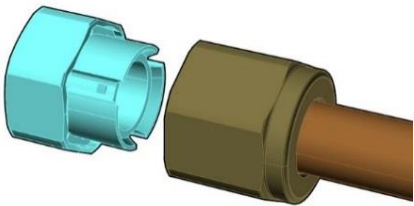
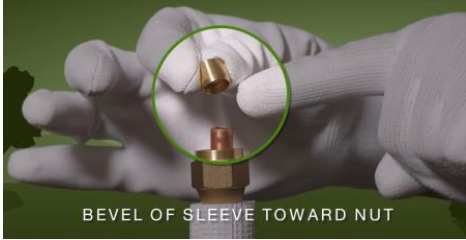





# Comparison data between EZ fitting and EBRILLE



		SmartLock EZ fitting	Ebrille Ebrilsmart
Seal Method		Metal to Metal	Triple metallic seal
Working Pressure		Over 110 bar (1595 Psi)	45 bar (652 Psi)
Maximum Pressure		Over 230 bar Until tube burst	According to catalog => 200 bar
Temperature		-40°C to 150°C (-40°F ~ 302°F)	-45°C to 150°C (-49°F ~ 302°F)
Refrigerant		Suitable for all refrigerants HCFC, HFC, HC	According to catalog => Suitable for all refrigerants HCFC, HFC, HC Questionable for how to use R32, R410 required 53 bar working pressure
Tube condition		Permit tube scratch (Below scratch depth 0.1mm)	No test data for tube scratch
Install	Marking	No required	Required
	Possibility of worker's mistake in installation	None 	Very high - Ferrule orientation error - Lost component 
	Fastening	Easy fasten until not showing O-ring 	Complicated fastening method 
	Noise and vibration resistance	Excellent 	Very questionable 