

ENGINEERING AND SPECIFICATIONS GUIDE

DUCT-FREE AIR CONDITIONING SYSTEMS • ART COOL • INVERTER • FLEX MULTI-SPLIT
 • FLOOR STANDING • CEILING CASSETTE • PTAC • PTHP • THROUGH-THE-WALL



LG Electronics, Air Conditioning Division
 1000 Sylvan Ave., Englewood Cliffs, NJ 07632

LG Electronics, Training Center
 11405 Old Roswell Road, Alpharetta, GA 30004

For technical support on a DFS and PTAC TTW Product call 888-865-3026, press 2.
 For general information call your local LG Sales Representative,
 or email us at lghvac@lge.com



INNOVATIVE COMFORT SOLUTIONS

AT LG WE BELIEVE COMFORT SHOULD ALWAYS BE BEAUTIFUL & INNOVATIVE.



MINI-SPLIT ART COOL, SINGLE ZONE AND INVERTER, SINGLE ZONE



9,800 and 11,500 BTUs
Cooling and Heat Pump
pg. 7,8



9,000-24,000 BTUs
Heat Pump Inverter
pg. 9-12

FLOOR STANDING AND CEILING CASSETTE, SINGLE ZONE



24,000 BTUs
Heat Pump Inverter
pg. 43



42,000 BTUs
Heat Pump Inverter
pg. 43



24,000 and 42,000 BTUs
Heat Pump Inverter
pg. 44

MINI-SPLIT STANDARD, SINGLE ZONE



9,000-24,000 BTUs
Cooling and Heat Pump
pg. 15-18



30,000 BTUs
Heat Pump Inverter
pg. 19

THROUGH-THE-WALL



8,000-14,000 BTUs
Cooling
10,000-12,000 BTUs
Heat/Cool
pg. 55-56

PACKAGED TERMINAL AIR CONDITIONERS



7,000-15,000 BTUs
Heat/Cool
7,000-15,000 BTUs
Heat Pump
pg. 49-55

FLEX MULTI-SPLIT, DUAL-, TRI- & QUAD-ZONE



Dual-Zone : Mix and match for 18,000-24,000 BTUs
Tri-Zone : Mix and match for 27,000-33,000 BTUs
Quad-Zone : Mix and match for 36,000-48,000 BTUs
Heat Pump Inverter
pg. 24-28

WINDOW AIR CONDITIONER



7,000-24,000 BTUs
Heat/Cool
pg. 58

ART COOL DISPLAY RACK



Mirror Type
Display Model
(model#: ASMC122ERH0)

Picture Type
Display Model
(model#: ASMC123F2G0)

Display (SS)
(model#: D-Rack)

WIRELESS WALL THERMOSTAT



Wireless Wall
Thermostat for
Duct-Free Systems
and PTACs

THE LG HVAC ADVANTAGE

Take advantage of our smart solutions for residential & commercial air conditioning applications.

LG HVAC systems offer a range of solutions that are cost efficient, quiet and attractive. They provide a smart alternative to both central HVAC and window-mounted air conditioners, and are available in a variety of configurations to suit different cooling and heating situations.

Split Systems

These innovative systems are “split” into indoor and outdoor units. The interior units are available in several different configurations: Art Cool, standard wall-mounted, Floor Standing and ceiling cassettes. All interior units have remote controls for easy use. Installation by a qualified HVAC contractor is safe and easy – no duct work or sheet metal is needed. Single, dual and tri-zone systems, as well as cooling only and heat pump models, are available.

Through-The-Wall Models

LG’s Through-The-Wall models offer versatile, energy efficient solutions for residential and light commercial applications. Both cooling and heat/cool models are available in a variety of capacities, with most models ENERGY STAR® qualified. The standard size chassis fits into any competitive sleeve, making upgrades a breeze.

PTAC Models

LG’s new PTAC units are perfect for lodging and healthcare applications. These units have an extremely low decibel level and outstanding sound prevention rating. Plus, LG models have efficiency ratings up to 12.5 EER, which translates into excellent energy savings.

Feature Advantages:

Look for these key features throughout the LG line.

- **Attractive, customizable indoor units.** Art Cool provides numerous options to complement any décor. The Art Cool Customizable Art Panel works like a picture frame – any art or photograph can be displayed. Other Art Cool units come in a variety of beautiful colors and finishes to suit any room.

- **Multi Power System™** Energy-saving twin compressors: one provides power at 60% capacity until the system reaches a desired temperature.

Then the smaller compressor takes over to provide sustained operation at 40% capacity.

- **Inverter.** Inverter heat pump air conditioners use a variable speed compressor, rather than the constant speed found in conventional ACs. Instead of shutting off once the desired temperature is reached, the inverter compressor continues to operate at low speed to maintain that temperature. It is quieter to operate and uses less energy than conventional ACs, which cycle on and off.



- **R-410A Refrigerant.** Environmentally friendly refrigerant utilized in the majority of LG systems.

NOTE: R-410A service port access will require a special adapter to attach standard 1/4" hoses. Ask your equipment supplier for more details.

- **Patented Plasma Air Purifying System.** The 4-stage system features a large, permanent filter and an electronic air purifier that captures microscopic contaminants like dust, mite, pollen and pet fur.

- **Art Cool Self-Cleaning Indoor Coil.** Drives dirt and moisture from coil surface leaving it clean and fresh smelling.

- **Dehumidifying Mode.** Indoor unit accurately senses room temperature and controls humidity by shutting down the compressor before a room is over-cooled.

- **Chaos Swing.** Electronically controlled louvers and fan speeds create a more natural, random flow of air, reducing temperature stratification.

- **Art Cool Three-way Cooling.** Air flows out of the unit from three directions, creating more natural circulation.

- **Jet Cool.** Operates at high speed for up to 30 minutes to quickly cool a room down to 64° F.

- **Swirl Wind.** Four-way controlled louvers and fan speeds create a stronger, wider air flow and reduce temperature stratification.

- **Auto Operation.** Provides three levels of comfort from which to choose. Temperature and fan speed will set automatically.

- **Manual Power Switch.** Easily accessed button allows for continued operation if the remote control is misplaced.

- **Defrost Control.** Shuts down the indoor fan to prevent cold air from being blown into the house. Removes frost from outdoor coil when the outdoor temperature is low (Heat Pump only).

- **Temperature Display.** Shows room temperature of interior unit.

- **Auto Sleep Mode.** Automatically increases the temperature setting 2° F twice (after 1/2 hour and one hour). The interior unit shuts off when the timer setting is reached.

- **Auto Restart.** Automatically restarts a unit to programmed setting when the electricity comes on after a power failure.


ART COOL™

ART COOL MINI-SPLIT SINGLE ZONE

Customized good looks

The slim, contemporary styling of the Art Cool models will appeal to today’s discerning customer. The 9,000 and 12,000 BTU picture models come with a frame that allows the customer to modify and personalize the unit with their own artwork or photography – the ultimate in custom design. Other Art Cool indoor units are available in popular finishes and colors to compliment any décor.

Art Cool Duct-Free Mini-Split Air Conditioning Systems from LG maximize the efficiency and economics of duct-free technology. Now you can bring more attractive, cost-effective solutions to your commercial and residential customers, providing single zone systems in both air conditioning and heat pump models.

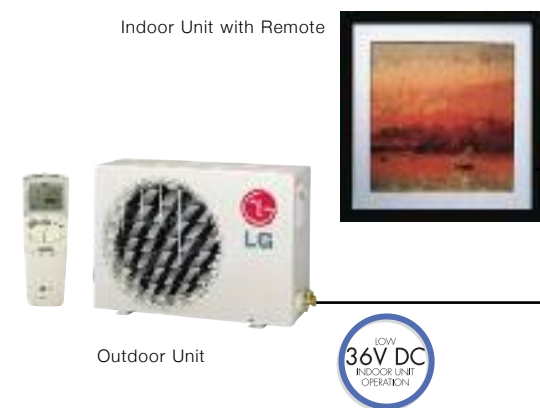

*Art Cool Picture 9,000-12,000 BTUs units only


Available styles and finishes



Mini-Split Art Cool Indoor Unit Customizable Picture Art Panel



Mini-Split Art Cool Inverter Indoor Unit Mirror Finish

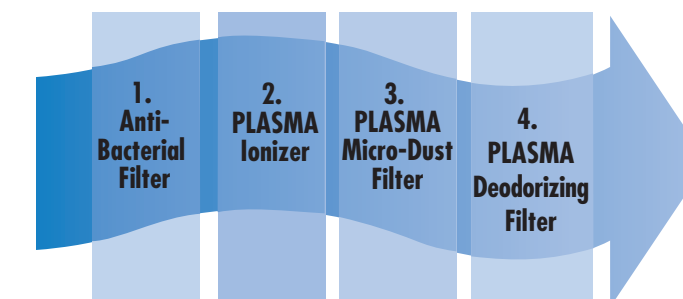

Outstanding air purification

The wall unit features LG’s PLASMA Air Purifying System that provides excellent indoor air quality. Freshen the air anytime, whether cooling a room or operating in fan only mode.

NOTE: All features are not available on all models. See product pages for details.

HIGH WALL DUCT-FREE • ART COOL MINI-SPLIT SINGLE ZONE

9,000 BTUs

LA091CNP (A/C Model)

9,800 BTUs Cooling

LA091HNP (H/P Model)

9,800 BTUs Cooling

9,800 BTUs Heating



FEATURES:

- Customizable art panel
- R-410A Refrigerant
- Plasma Air Purifying System
- Self-cleaning indoor coil
- Dehumidifying mode
- Chaos Swing
- Three-way cooling
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Fan mode
- Auto operation
- Manual power switch
- Defrost control (H/P model only)
- Auto sleep mode
- Auto restart
- Built-in low ambient standard, down to 0°F (cooling mode)
- 24-Hour on/off timer
- Evaporator frost control
- Gold Fin™ Anti-Corrosion

Interior Unit Includes:

- Wall unit
- Installation plate & hardware

System Model #	LA091CNP	LA091HNP
Indoor Model #	LAN091CNP	LAN091HNP
Outdoor Model #	LAU091CNP	LAU091HNP
Performance		
Capacity (BTUs)	C 9,800	C 9,800 H 9,800
SEER	13	13
Air Circulation (CFM H/M/L)	330/261/194	330/261/194
Fan Speeds	4/Auto/Chaos	4/Auto/Chaos
Dehumidification (pts/hour)	3.0	3.0
Indoor dB(A) *	41/35/29	41/35/29
Outdoor dB(A) *	48	48
Electrical		
Rated Voltage Outdoor	115-60-1	115-60-1
Rated Voltage Indoor	36V DC	36V DC
Indoor Dimensions		
W x H x D (inches)	23 5/8 x 5 3/4	23 5/8 x 5 3/4
Weight (lbs.)	33.1	33.1
Outdoor Dimensions		
W x H x D (inches)	30 5/16 x 9 5/8	30 5/16 x 9 5/8
Weight (lbs.)	70.5	70.5
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • ART COOL MINI-SPLIT SINGLE ZONE

12,000 BTUs

LA121CNP (A/C Model)

11,500 BTUs Cooling

LA121HNP (H/P Model)

11,500 BTUs Cooling



FEATURES:

- Customizable art panel
- R-410A Refrigerant
- Plasma Air Purifying System
- Self-cleaning indoor coil
- Dehumidifying mode
- Chaos Swing
- Three-way cooling
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Fan mode
- Auto operation
- Manual power switch
- Defrost control (H/P model only)
- Auto sleep mode
- Auto restart
- Built-in low ambient standard, down to 0°F (cooling mode)
- 24-Hour on/off timer
- Evaporator frost control
- Gold Fin™ Anti-Corrosion
- Installation plate & hardware

Interior Unit Includes:

- Wall unit

System Model #	LA121CNP	LA121HNP
Indoor Model #	LAN121CNP	LAN121HNP
Outdoor Model #	LAU121CNP	LAU121HNP
Performance		
Capacity (BTUs)	C 11,500	C 11,500 H 11,500
SEER	13	13
Air Circulation (CFM H/M/L)	330/261/194	330/261/194
Fan Speeds	4/Auto/Chaos	4/Auto/Chaos
Dehumidification (pts/hour)	3.0	3.0
Indoor dB(A) *	41/35/29	41/35/29
Outdoor dB(A) *	48	48
Electrical		
Rated Voltage Outdoor	115-60-1	115-60-1
Rated Voltage Indoor	36V DC	36V DC
Indoor Dimensions		
W x H x D (inches)	23 5/8 x 5 3/4	23 5/8 x 5 3/4
Weight (lbs.)	33.1	33.1
Outdoor Dimensions		
W x H x D (inches)	30 5/16 x 9 5/8	30 5/16 x 9 5/8
Weight (lbs.)	70.5	70.5
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • ART COOL MINI-SPLIT SINGLE ZONE • INVERTER

9,000 BTUs

LA095HV (H/P Model)
 9,200 BTUs Cooling
 12,000 BTUs Heating



FEATURES:

- Inverter (Variable speed compressor)
- R-410A Refrigerant
- Plasma air purifying system
- Chaos Swing
- Self-cleaning indoor coil
- Auto changeover
- Jet Cool
- Cooling/Heating/Fan Mode
- Auto sleep mode
- Ultra-quiet operation
- Dehumidifying mode
- Auto restart
- 24-Hour on/off timer
- Built-in low ambient standard, down to 14°F (cooling mode)
- Manual power switch
- Defrost control
- Temperature display on indoor unit
- Evaporator frost control
- Energy Saving
- Gold Fin™ Anti-Corrosion
- Standard mirror panel
- Interior Unit Includes:
 - Wall unit
 - Installation plate & hardware
 - Remote control, batteries, holder & holder hardware
 - Installation manual

System Model #	LA095HV
Indoor Model #	LAN095HV
Outdoor Model #	LAU095HV
Performance	
Capacity (BTUs)	C 9,200/8,900 H 12,000/11,700
SEER	19.7/19.1
Air Circulation (CFM H/M/L)	230/180/140
Fan Speeds	5/Auto/Chaos
Dehumidification (pts/hr)	2.6
Indoor dB(A) *	38/35/32
Outdoor dB(A) *	48
Electrical	
Rated Voltage Outdoor	230/208-60-1
Rated Voltage Indoor	230/208-60-1
Indoor Dimensions	
W x H x D (inches)	35 3/16 x 11 1/8 x 6 1/2
Weight (lbs.)	23.1
Outdoor Dimensions	
W x H x D (inches)	30 5/16 x 21 5/16 x 9 5/8
Weight (lbs.)	83.8
Thermostat Range	
Cooling / Heating (°F)	64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • ART COOL MINI-SPLIT SINGLE ZONE • INVERTER

12,000 BTUs

LA125HV (H/P Model)
 12,000 BTUs Cooling
 15,500 BTUs Heating



FEATURES:

- Inverter (Variable speed compressor)
- R-410A Refrigerant
- Plasma air purifying system
- Chaos Swing
- Self-cleaning indoor coil
- Auto changeover
- Jet Cool
- Cooling/Heating/Fan Mode
- Auto sleep mode
- Ultra-quiet operation
- Dehumidifying mode
- Auto restart
- 24-Hour on/off timer
- Built-in low ambient standard, down to 14°F (cooling mode)
- Manual power switch
- Defrost control
- Temperature display on indoor unit
- Evaporator frost control
- Energy Saving
- Gold Fin™ Anti-Corrosion
- Standard mirror panel
- Interior Unit Includes:
 - Wall unit
 - Installation plate & hardware
 - Remote control, batteries, holder & holder hardware
 - Installation manual

System Model #	LA125HV
Indoor Model #	LAN125HV
Outdoor Model #	LAU125HV
Performance	
Capacity (BTUs)	C 12,000/11,700 H 15,500/15,200
SEER	18.7/18.2
Air Circulation (CFM H/M/L)	250/180/140
Fan Speeds	5/Auto/Chaos
Dehumidification (pts/hr)	3.0
Indoor dB(A) *	41/35/32
Outdoor dB(A) *	48
Electrical	
Rated Voltage Outdoor	230/208-60-1
Rated Voltage Indoor	230/208-60-1
Indoor Dimensions	
W x H x D (inches)	35 3/16 x 11 1/8 x 6 1/2
Weight (lbs.)	23.1
Outdoor Dimensions	
W x H x D (inches)	30 5/16 x 21 5/16 x 9 5/8
Weight (lbs.)	83.8
Thermostat Range	
Cooling / Heating (°F)	64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • ART COOL MINI-SPLIT SINGLE ZONE • INVERTER

18,000 BTUs

LA185HV (H/P Model)
 18,000 BTUs Cooling
 20,700 BTUs Heating



FEATURES:

- Inverter (Variable speed compressor)
 - R-410A Refrigerant
 - Plasma air purifying system
 - Chaos Swing
 - Self-cleaning indoor coil
 - Auto changeover
 - Jet Cool
 - Cooling/Heating/Fan Mode
 - Auto sleep mode
 - Ultra-quiet operation
 - Dehumidifying mode
 - Auto restart
 - 24-Hour on/off timer
 - Built-in low ambient standard, down to 14°F (cooling mode)
 - Manual power switch
 - Defrost control
 - Temperature display on indoor unit
 - Evaporator frost control
 - Energy Saving
 - Gold Fin™ Anti-Corrosion
 - Standard mirror panel
- Interior Unit Includes:**
- Wall unit
 - Installation plate & hardware
 - Remote control, batteries, holder & holder hardware
 - Installation manual

System Model # LA185HV

Indoor Model # LAN185HV
 Outdoor Model # LAU185HV

Performance

Capacity (BTUs) **C** 18,000/17,500
H 20,700/20,200

SEER 16.2/16.2

Air Circulation (CFM H/M/L) 450/380/320

Fan Speeds 5/Auto/Chaos

Dehumidification (pts/hr) 5.3

Indoor dB(A) * 42/39/36

Outdoor dB(A) * 55

Electrical

Rated Voltage Outdoor 230/208-60-1

Rated Voltage Indoor 230/208-60-1

Indoor Dimensions 43 11/16 x

W x H x D (inches) 11 3/4 x

7 7/8

Weight (lbs.) 31.1

Outdoor Dimensions 34 5/16 x

W x H x D (inches) 25 13/16 x

12 5/8

Weight (lbs.) 101.4

Thermostat Range

Cooling / Heating (°F) 64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • ART COOL MINI-SPLIT SINGLE ZONE • INVERTER

24,000 BTUs

LA245HV (H/P Model)
 24,000 BTUs Cooling



FEATURES:

- Inverter (Variable speed compressor)
 - R-410A Refrigerant
 - Plasma air purifying system
 - Chaos Swing
 - Self-cleaning indoor coil
 - Auto changeover
 - Jet Cool
 - Cooling/Heating/Fan Mode
 - Auto sleep mode
 - Ultra-quiet operation
 - Dehumidifying mode
 - Auto restart
 - 24-Hour on/off timer
 - Built-in low ambient standard, down to 14°F (cooling mode)
 - Manual power switch
 - Defrost control
 - Temperature display on indoor unit
 - Evaporator frost control
 - Energy Saving
 - Gold Fin™ Anti-Corrosion
 - Standard mirror panel
- Interior Unit Includes:**
- Wall unit
 - Installation plate & hardware
 - Remote control, batteries, holder & holder hardware
 - Installation manual

System Model # LA245HV

Indoor Model # LAN245HV
 Outdoor Model # LAU245HV

Performance

Capacity (BTUs) **C** 24,000/23,600
H 27,600/27,200

SEER 16.2/16.2

Air Circulation (CFM H/M/L) 550/445/378

Fan Speeds 5/Auto/Chaos

Dehumidification (pts/hr) 5.6

Indoor dB(A) * 47/42/39

Outdoor dB(A) * 56

Electrical

Rated Voltage Outdoor 230/208-60-1

Rated Voltage Indoor 230/208-60-1

Indoor Dimensions 43 11/16 x

W x H x D (inches) 11 3/4 x

7 7/8

Weight (lbs.) 31.1

Outdoor Dimensions 34 5/16 x

W x H x D (inches) 25 13/16 x

12 5/8

Weight (lbs.) 172.2

Thermostat Range

Cooling / Heating (°F) 64-86/60-86

*LG verified sound ratings

ART COOL MINI-SPLIT SINGLE ZONE • INVERTER

ELECTRICAL & REFRIGERATION • QUICK REFERENCE

Type		Model	BTUs	Voltage		Rated	MCA*	MOP**
Art Cool				Indoor	Outdoor	Amps		
Single-Zone	A/C	Ⓒ	LA091C	NP	9,800	36V DC	115	7.2
15	20	A/C	Ⓒ	LA121CN	P	11,500	36V DC	115
9.3	15	20	H/P	Ⓒ Ⓓ	LA091HN	P	9,800	36V DC
115	7.2	15	20	H/P	Ⓒ Ⓓ	LA121HN	P	11,500
36V DC	115	9.3	15	20	H/P	Ⓒ Ⓓ	LA095HV	9,200
230/208	230/208	6.0/7.3	10	15	H/P	Ⓒ Ⓓ	LA125HV	12,000
230/208	230/208	6.0/7.3	10	15	H/P	Ⓒ Ⓓ	LA185HV	18,000

All equipment single phase.

NOTE: Please see local electrical codes for proper wire specifications.

*Minimum Circuit Ampacity
**Maximum Overcurrent Protection

Wire Size	
Minimum wiring requirements suggested by manufacturer.	
Minimum AWG	14-3
Indoor/Outdoor Connecting Cable	Minimum AWG

Type	Model	BTUs	Pipe Size	Additional	Max. Pipe	Max.		
Art Cool			Liquid	Suction	Refrigerant	Length	Elevation	
Single-Zone	A/C	Ⓒ	LA091CNP	9,800	1/4"	1/2"	0.22	oz./ft. 50'
25'	A/C	Ⓒ	LA121CN	P	11,500	1/4"	1/2"	0.22
oz./ft. 50'	25'	H/P	Ⓒ Ⓓ	LA091HN	P	9,800	1/4"	
1/2"	0.22	oz./ft. 50'	25'	H/P	Ⓒ Ⓓ	LA121HN	P	
11,500	1/4"	1/2"	0.22	oz./ft. 50'	25'	H/P	Ⓒ Ⓓ	LA095HV
9,200	1/4"	3/8"	0.22	oz./ft. 50'	25'	H/P	Ⓒ Ⓓ	LA125HV
12,000	1/4"	3/8"	0.22	oz./ft. 50'	25'	H/P	Ⓒ Ⓓ	LA185HV

**Each system is pre-charged with enough refrigerant to charge 25 ft. of line and the interior unit.

NOTE: Systems having the outdoor unit mounted above the indoor unit (e.g., basement installations) have the following additional requirement: For systems with maximum elevation of 25 ft. (see chart above and Figure A), refrigerant lines must be oil trapped between 8 ft. and 16.4 ft. of elevation.

For systems with elevation of greater than 25 ft. (see chart above), refrigerant lines must be oil trapped at least every 16.4 ft. of elevation.

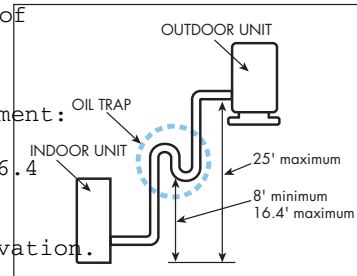


Figure A.
Example: 25 ft. maximum

MINI-SPLIT STANDARD AIR CONDITIONERS SINGLE-ZONE

Mini-Split Standard systems utilize the same duct-free technology as Art Cool units in a streamlined, low profile design. Models are available in a variety of sizes from 9,000 through 30,000 BTUs. LG's Mini-split standard air conditioners are easy to install, efficient and cost effective.

Available styles



Mini-Split Standard Indoor Unit
White
9,000-24,000 BTUs



Heat Pump Inverter
White
30,000 BTUs





Indoor Unit



Outdoor Unit



*9,000 - 24,000 BTUs units only



HIGH WALL DUCT-FREE • MINI-SPLIT STANDARD SINGLE ZONE

9,000 BTUs

LS092CE (A/C Model)
9,000 BTUs Cooling

LS092HE (H/P Model)
9,800 BTUs Cooling



FEATURES:

- R-410A Refrigerant
- Plasma air purifying system
- Gold Fin™ Anti-corrosion
- Dehumidifying mode
- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Fan mode
- Auto operation
- Manual power switch
- Defrost control (H/P model only)
- Temperature display on indoor unit
- Auto sleep mode
- Auto restart
- 24-Hour on/off timer
- Built-in low ambient standard, down to 0°F (cooling mode)
- 4 Fan speeds
- Ultra-quiet operation
- Evaporator frost control

Interior Unit Includes:

- Wall unit
- Installation plate & hardware
- Remote control, batteries, holder & holder hardware
- Installation manual

System Model #	LS092CE	LS092HE
Indoor Model #	LSN092CE	LSN092HE
Outdoor Model #	LSU092CE	LSU092HE
Performance		
Capacity (BTUs)	C 9,000	C 9,800 H 9,800
SEER	13	13
Air Circulation (CFM H/M/L)	250/210/170	330/280/230
Fan Speeds	4/Auto/Chaos	4/Auto/Chaos
Dehumidification (pts/hr)	2.6	3.0
Indoor dB(A) *	36/31/28	41/36/34
Outdoor dB(A) *	48	48
Electrical		
Rated Voltage Outdoor	115-60-1	115-60-1
Rated Voltage Indoor	36V DC	36V DC
Indoor Dimensions		
W x H x D (inches)	33 1/16 x 10 5/8 x 6 1/32	35 3/16 x 11 5/8 x 6 1/2
Weight (lbs.)	15.4	20.5
Outdoor Dimensions		
W x H x D (inches)	30 5/16 x 21 5/16 x 9 5/8	30 5/16 x 21 5/16 x 9 5/8
Weight (lbs.)	66.1	72.8
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • MINI-SPLIT STANDARD SINGLE ZONE

12,000 BTUs

LS122CE (A/C Model)
11,500 BTUs Cooling

LS122HE (H/P Model)
11,500 BTUs Cooling
11,500 BTUs Heating



FEATURES:

- R-410A Refrigerant
- Plasma air purifying system
- Gold Fin™ Anti-corrosion
- Dehumidifying mode
- Chaos Swing
- Jet Cool
- Cooling mode
- Heating mode (H/P model only)
- Fan mode
- Auto operation
- Manual power switch
- Defrost control (H/P model only)
- Temperature display on indoor unit
- Auto sleep mode
- Auto restart
- 24-Hour on/off timer
- Built-in low ambient standard, down to 0°F (cooling mode)
- 4 Fan speeds
- Ultra-quiet operation
- Evaporator frost control

Interior Unit Includes:

- Wall unit
- Installation plate & hardware
- Remote control, batteries, holder & holder hardware
- Installation manual

System Model #	LS122CE	LS122HE
Indoor Model #	LSN122CE	LSN122HE
Outdoor Model #	LSU122CE	LSU122HE
Performance		
Capacity (BTUs)	C 11,500	C 11,500 H 11,500
SEER	13	13
Air Circulation (CFM H/M/L)	330/280/230	330/280/230
Fan Speeds	4/Auto/Chaos	4/Auto/Chaos
Dehumidification (pts/hr)	3.0	3.0
Indoor dB(A) *	41/36/34	41/36/34
Outdoor dB(A) *	48	48
Electrical		
Rated Voltage Outdoor	115-1-60	115-1-60
Rated Voltage Indoor	36V DC	36V DC
Indoor Dimensions		
W x H x D (inches)	35 3/16 x 11 5/8 x 6 1/2	35 3/16 x 11 5/8 x 6 1/2
Weight (lbs.)	20.5	20.5
Outdoor Dimensions		
W x H x D (inches)	30 5/16 x 21 5/16 x 9 5/8	30 5/16 x 21 5/16 x 9 5/8
Weight (lbs.)	72.8	72.8
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • MINI-SPLIT STANDARD SINGLE ZONE

18,000 BTUs

LS182CE (A/C Model)
 18,000 BTUs Cooling

LS182HE (H/P Model)
 19,500 BTUs Cooling



FEATURES:

- | | | | |
|---|---|---|--|
| <ul style="list-style-type: none"> Multi Power System™ R-410A Refrigerant Plasma air purifying system Gold Fin™ Anti-corrosion Dehumidifying mode Chaos Swing Jet Cool Cooling mode | <ul style="list-style-type: none"> Heating mode (H/P model only) Fan mode Auto operation Manual power switch Defrost control (H/P model only) Temperature display on indoor unit Auto sleep mode Auto restart | <ul style="list-style-type: none"> 24-Hour on/off timer Ultra-quiet operation Evaporator frost control 4 Fan speeds | <ul style="list-style-type: none"> Remote control, batteries, holder & holder hardware Installation manual |
|---|---|---|--|
- Interior Unit Includes:**
- Exterior unit
 - Exterior unit has sufficient refrigerant for charging indoor
- Exterior Unit Includes:**
- Exterior unit
 - Exterior unit has sufficient refrigerant for charging indoor coil and a 25' line set (line set holder & holder hardware)
 - Installation manual

System Model #	LS182CE	LS182HE
Indoor Model #	LSN182CE	LSN182HE
Outdoor Model #	LSU182CE	LSU182HE
Performance		
Capacity (BTUs)	18,000/17,800	19,500/19,000
SEER	13	13
Air Circulation (CFM H/M/L)	450/380/320	530/450/370
Fan Speeds	4/Auto/Chaos	4/Auto/Chaos
Dehumidification (pts/hr)	5.3	6.6
Indoor dB(A) *	41/38/36	46/41/38
Outdoor dB(A) *	55	57
Electrical		
Rated Voltage Outdoor	230/208-60-1	230/208-60-1
Rated Voltage Indoor	36V DC	36V DC
Indoor Dimensions		
W x H x D (inches)	42 15/16 x 11 13/16 x 7 1/32	42 15/16 x 11 13/16 x 7 1/32
Weight (lbs.)	28.6	28.6
Outdoor Dimensions		
W x H x D (inches)	34 5/16 x 25 13/16 x 12 5/8	34 5/16 x 31 1/2 x 12 5/8
Weight (lbs.)	149.9	169.6
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • MINI-SPLIT STANDARD SINGLE ZONE

24,000 BTUs

LS242CE (A/C Model)
 22,500 BTUs Cooling

LS242HE (H/P Model)
 22,500 BTUs



FEATURES:

- | | | | |
|--|--|---|---|
| <ul style="list-style-type: none"> Multi Power System™ R-410A Refrigerant Plasma air purifying system Gold Fin™ Anti-corrosion Dehumidifying mode Chaos Swing Jet Cool Cooling mode Heating mode (H/P model only) | <ul style="list-style-type: none"> Fan mode Auto operation Manual power switch Defrost control (H/P model only) Temperature display on indoor unit Auto sleep mode Auto restart 24-Hour on/off timer | <ul style="list-style-type: none"> Ultra-quiet operation Evaporator frost control 4 Fan speeds | <ul style="list-style-type: none"> holder & holder hardware Installation manual |
|--|--|---|---|
- Interior Unit Includes:**
- Exterior unit
 - Exterior unit has sufficient refrigerant for charging indoor coil and a 25' line set (line set holder & holder hardware)
 - Installation manual
- Exterior Unit Includes:**
- Exterior unit
 - Exterior unit has sufficient refrigerant for charging indoor coil and a 25' line set (line set holder & holder hardware)
 - Installation manual

System Model #	LS242CE	LS242HE
Indoor Model #	LSN242CE	LSN242HE
Outdoor Model #	LSU242CE	LSU242HE
Performance		
Capacity (BTUs)	22,500/22,100	22,500/22,100
SEER	13	13
Air Circulation (CFM H/M/L)	550/450/370	530/450/370
Fan Speeds	4/Auto/Chaos	4/Auto/Chaos
Dehumidification (pts/hr)	6.6	6.6
Indoor dB(A) *	46/41/38	46/41/38
Outdoor dB(A) *	57	57
Electrical		
Rated Voltage Outdoor	230/208-60-1	230/208-60-1
Rated Voltage Indoor	36V DC	36V DC
Indoor Dimensions		
W x H x D (inches)	42 15/16 x 11 13/16 x 7 1/32	42 15/16 x 11 13/16 x 7 1/32
Weight (lbs.)	28.6	28.6
Outdoor Dimensions		
W x H x D (inches)	34 5/16 x 31 1/2 x 12 5/8	34 5/16 x 31 1/2 x 12 5/8
Weight (lbs.)	169.6	169.6
Thermostat Range		
Cooling / Heating (°F)	64-86	64-86/60-86

*LG verified sound ratings

HIGH WALL DUCT-FREE • MINI-SPLIT STANDARD SINGLE ZONE • INVERTER

30,000 BTUs

- LS305HV** (H/P Model)
- C** 27,000 BTUs Cooling
- H** 29,000 BTUs Heating



FEATURES:

- Inverter (Variable speed compressor)
- R-410A Refrigerant
- Plasma air purifying system
- Gold Fin™ Anti-Corrosion
- Chaos Swing
- Self-cleaning indoor coil
- Auto changeover
- Jet Cool
- Cooling/Heating/Fan Mode
- Auto sleep mode
- Ultra-quiet operation
- Dehumidifying mode
- Auto restart
- 24-Hour on/off timer
- Built-in low ambient standard, down to 14°F (cooling mode)
- Manual power switch
- Defrost control
- Temperature display on indoor unit
- Evaporator frost control
- Energy Saving
- 4 Fan speeds
- Installation manual

Interior Unit Includes:

- Wall unit
- Installation plate & hardware
- Remote control, batteries, holder & holder hardware

System Model #	LS305HV
Indoor Model #	LSN305HV
Outdoor Model #	LSU305HV

Performance	
Capacity (BTUs)	C 27,000/27,000 H 29,000/29,000
SEER	16
Air Circulation (CFM H/M/L)	710/640/530
Fan Speeds	4/Auto/Chaos
Dehumidification (pts/hr)	7.2
Indoor dB(A) *	47/42/39
Outdoor dB(A) *	58

Electrical	
Rated Voltage Outdoor	230/208-60-1
Rated Voltage Indoor	230/208-60-1

Indoor Dimensions	
W x H x D (inches)	47 3/5 x 13 3/5 x 8 1/4
Weight (lbs.)	37.5

Outdoor Dimensions	
W x H x D (inches)	34 1/4 x 31 1/4 x 12 3/5
Weight (lbs.)	147.7

Thermostat Range	
Cooling / Heating (°F)	64-86 / 60-86

*LG verified sound ratings

MINI-SPLIT STANDARD SINGLE ZONE

ELECTRICAL & REFRIGERATION • QUICK REFERENCE

Electrical Specifications									
	Type	System	BTUs	Voltage		Rated Amps	MCA*	MOP**	
				Indoor	Outdoor				
Mini-Split	A/C	C	LS092CE	9,000	36V DC	115	7.0	15	15
Standard	A/C	C	LS122CE	11,500	36V DC	115	10.5	15	20
Single-Zone	A/C	C	LS182CE	18,000	36V DC	230/208	8.6/9.5	15	20
	A/C	C	LS242CE	22,500	36V DC	230/208	11.5/12.	5	20
30		H/P	C H	LS092HE	9,800	36V DC	115	10.5	15
20		H/P	C H	LS122HE	11,500	36V DC	115	10.5	15
20		H/P	C H	LS182HE	19,500	36V DC	230/208	11.5/12.	5
20	30		H/P	C H	LS242HE	22,500	36V DC	230/208	11.5/12.
5	20	30		H/P	C H	LS305HV	27,000/ 29,000	230/208	230/208

All equipment single phase.

NOTE: Please see local electrical codes for proper wire specifications.

*Minimum Circuit Ampacity **Maximum Overcurrent Protection

Wire Size	
Minimum wiring requirements suggested by manufacturer.	
Minimum AWG	14-3
Indoor/Outdoor Connecting Cable	12-3***
Minimum AWG	18-4

Refrigerant Line & Formula Specifications [†]									
	Type	System	BTUs	Pipe Size		Additional Refrigerant	Max. length each pipe	Max. elevation	
				Liquid	Suction				
Mini-Split	A/C	C	LS092CE	9,000	1/4"	3/8"	0.22 oz./ft.	50'	
25'	Standard		A/C	C	LS122CE	11,500	1/4"	1/2"	0.22
oz./ft.	50'	25'	Single-Zone		A/C	C	LS182CE	18,000	1/4"
1/2 "	0.22	oz./ft.	100'	50'		A/C	C	LS242CE	22,500
1/4"	5/8"	0.22	oz./ft.	100'	50'		H/P	C H	LS092HE
9,800	1/4"	1/2"	0.22	oz./ft.	50'	25'		H/P	C H
LS122HE	11,500	1/4"	1/2"	0.22	oz./ft.	50'	25'		H/P
C H	LS182H	E	19,500	1/4"	5/8"	0.22	oz./ft.	100'	50'
	H/P	C H	LS242HE	22,500	1/4"	5/8"	0.22	oz./ft.	100'

Each system is pre-charged with enough refrigerant to charge 25 ft. of line and the interior unit.

NOTE: Systems having the outdoor unit mounted above the indoor unit (e.g. basement installations) have the following additional requirement: For systems with elevation of 25 ft. (see chart above and figure A), refrigerant lines must be oil trapped between 8 ft. and 16.4 ft. of elevation. For systems with




Figure A.
Example: 25 ft. maximum

DUCT-FREE AIR CONDITIONERS

LG INTERNET SALES POLICY

Duct-Free Air Conditioning Products

LG's expressed Duct-Free Air Conditioning warranty policy applies only to products sold and installed by qualified air conditioning contractors.

Because products sold via the Internet cannot be assured of quality installation by a qualified air conditioning contractor, LG's expressed warranty may not apply to internet sales.

LG supports and recommends that a qualified air conditioning contractor properly size and install all LG Duct-Free Air Conditioning products for optimal performance and long life.

FOR THE HVAC PROFESSIONAL

INSTALLATION • MATERIALS

Don't forget to BUY...

- ¥ Mounting screws and anchors (wall mount and ceiling cassette)
- ¥ Optional condensate pump (interior wall installation only)
- ¥ Condensate drain tubing
- ¥ Hose clamps
- ¥ Refrigerant line
- ¥ Correct electrical wire to connect indoor and outdoor units based on the LG model chosen (see electrical specifications) and local electrical code requirements
- ¥ Closed cell insulating tubing for liquid and suction lines
- ¥ Electrical tape
- ¥ Condenser mounting pad
- ¥ Disconnect and wiring for condenser unit
- ¥ Plastic duct and installation hardware to conceal connecting tubing on exterior walls
- ¥ Anchor bolts (optional for units based on the LG model floor standing)

Don't forget to

- Level gauge
- 1/2" or 3/4" hole core drill
- Flaring tool set
- Gas leak detector

REMEMBER THESE



Low Ambient Wiring Kit #ICM 326H



Low Voltage Condensate Pump
24V Condensate Pumps available from Aspen Pumps by calling 732-248-8066*



Recommended source for 18/4 Stranded Shielded Wire required for LG's Duct-Free units (to order call 800-322-3660)



Wireless Energy Management Digital Wall Thermostat for Duct-Free Systems
Part #DFSWLWTOA
See page 51 for more details. Applicable to 36V DC indoor models (Single Zone) only

FLEX MULTI-SPLIT DUAL-, TRI- & QUAD-ZONE AIR CONDITIONING SYSTEMS

Flex Multi-Split Systems

The larger, Flex Multi-Split systems operate two, three or four interior units that are mounted in separate rooms. Each indoor unit comes with its own remote control, allowing the customer to set the temperature individually in different rooms. These units are connected to a single exterior unit.

The interior units are available in a variety of styles, including Art Cool, Standard, Ceiling Cassette, and Ceiling Concealed Duct models. Dual-, Tri- and Quad-Zone are available in Heat Pump systems.



Dual-Zone
Flex Multi-Split System
Mix and match for 18,000-24,000 BTUs
Heat Pump Inverter



Tri-Zone
Flex Multi-Split System
Mix and match for 27,000-33,000 BTUs
Heat Pump Inverter



Quad-Zone
Flex Multi-Split System
Mix and match for 36,000-48,000 BTUs
Heat Pump Inverter

Available styles and finishes



Flex Multi-Split Art Cool Indoor Unit
Mirror Finish



Standard Mirror
PSAPECR10 (9, 12K)
PSAP8CR10 (18, 24K)



Organic Cream White
PSAPECW10 (9, 12K)
PSAP8CW10 (18, 24K)




Art Flower Gold
PSAPECF10 (9, 12K)
PSAP8CF10 (18, 24K)



Snow Flower White
PSAPECT10 (9, 12K)
PSAP8CT10 (18, 24K)



Flex Multi-Split Standard Indoor Unit

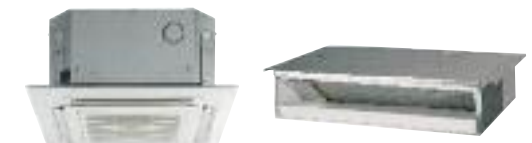

Flex Multi-Split Ceiling Cassette & Ceiling Concealed Duct

FLEX MULTI-SPLIT • DUAL-, TRI- & QUAD-ZONE

*LG is not responsible for improper installation.

WHY LG?

Energy Saving
with LG inverter Technology

Wide Choice of Indoor Units
Standard, Art Cool, Concealed Duct,
Cassette Types

Design Flexibility

Outdoor units connect to several indoor unit styles

Outdoor Units H/P Inverter



DUAL - ZONE
LMU185HV

TRI - ZONE
LMU245HV

QUAD - ZONE
LMU365HV



OUTDOOR UNITS H/P INVERTER

18,000-36,000 BTUs

- C^H** LMU185HV
Dual - Zone
- C^H** LMU245HV
Tri - Zone
- C^H** LMU365HV
Quad - Zone



DUAL - ZONE
LMU185HV

TRI - ZONE
LMU245HV

QUAD - ZONE
LMU365HV

FEATURES:

- Defrost /Deicing
- Restart delay (3-minutes)
- Self diagnosis
- Soft start
- Auto operation (Artificial intelligence)
- Auto restart operation
- Low ambient operation
- Gold Fin™ Anti-Corrosion

External Unit Installation manual
• External Unit
• Sufficient refrigerant for charging 2, 3 or 4 indoor coils
(Please see chart below for

Outdoor Model H/P Inverter #			LMU185HV	LMU245HV	LMU365HV
Capacity *	BTU/h		18,000 Class	24,000 Class	36,000 Class
Power Input (Min.~Rated~Max.)	Cooling	kW	0.52~1.26~2.05	0.72~1.64~3.27	0.72~3.21~3.92
	Heating	kW	0.77~1.63~2.18	0.72~2.86~3.5	0.72~3.7~4.10
Running Current	Cooling	A	2.3~5.7~9.5	3.0~7.2~14.5	3.0~14.2~17.3
	Heating	A	3.4~7.2~9.6	4.5~12.4~15.5	4.5~16.3~18.5
Power Supply		fl / V / Hz	1/208~230/60	1/208~230/60	1/208~230/60
Power Supply Cable (Outdoor)		No. x AWG	3 x 14	3 x 12	3 x 12
Transmission Cable (Outdoor to Indoor unit)		No. x AWG	4 x 18	4 x 18	4 x 18
Dimensions (W x H x D)		inch	34.3x25.8x12.6	34.3x31.8x12.6	34.3x31.8x12.6
Net Weight		lbs	115	143.3	143.3
Max. # of Connectable Indoor Units			2	3	4
Refrigerant	Charge (at 24.6 ft. bz)		59.97	89.95	89.95
	Type		R410A	R410A	R410A
	Control		EEV	EEV	EEV
Sound Level (H/L)	Sound Pressure	dB(A)+3	51/45	52	52
Piping Connections	Liquid	inch	1/4 x 2EA	1/4 x 3EA	1/4 x 4EA
	Gas	inch	3/8 x 2EA	3/8 x 3EA	3/8 x 4EA
Piping length spec.	Max. total piping	ft.	164.0	246.1	246.1
	Max. OD~ID piping	ft.	82.0	82.0	82.0
	Piping length (add 1 refrigerant)	ft.		73.8	123.0 123.0
Max. Elevation Difference Outdoor Unit~Indoor Unit	Outdoor Unit~Indoor Unit	ft	49.2	49.2	49.2
	Indoor Unit~Indoor Unit	ft	24.6	24.6	24.6
Operation Range (Outdoor)	Cooling	BF	14 ~114.8	14 ~114.8	14 ~114.8
	Heating	BF	5~ 75.2	5~ 75.2	5~ 75.2

Note:
1. Capacities are based on the following conditions:
Cooling: - Indoor Temperature 80°F (26.7°C) DB/67°F (19.4°C) WB
- Outdoor Temperature 95°F (35°C) DB/75°F (23.9°C) WB
Heating: - Indoor Temperature 70°F (21.1°C) DB/60°F (15.6°C) WB
- Outdoor Temperature 47°F (8.3°C) DB/43°F (6.1°C) WB
Piping Length: - Interconnecting Piping Length 24.6 ft.(7.5m)
- Level Difference of Zero

2. Wiring cable size must comply with the applicable local and national code.
3. The specification may be subject to change without prior notice for purpose of improvement.
4. For more capacity(*) information, refer to the combination tables.
5. The data mentioned in the above table are only for non-ducted type of indoor unit.

STANDARD • FLEX MULTI-SPLIT

9,000-18,000 BTUs

- LMN095HV (H/P Model)
- LMN125HV (H/P Model)
- LMN185HV (H/P Model)



FEATURES:

- Inverter(Variable speed compressor)
- Auto restart operation
- Chaos Swing
- Jet Cool
- Plasma air purifying system
- Self-cleaning indoor coil
- Auto operation (Artificial Intelligence)
- 24-Hour on/off timer

Interior Unit Includes:

- Wall unit
- Installation plate & hardware
- Wireless LCD remote control, batteries, holder & holder hardware

- Owner's manual
- ETL# : 3091879

Indoor Model H/P Inverter #	LMN095HV	LMN125HV	LMN185HV
Performance			
Capacity* (BTU/h)	9,000 Class	12,000 Class	18,000 Class
Fan Air Flow Rate (CMM)	8.0/7.0/5.0	10.0/8.0/6.0	12.0/10.5/9.0
(CFM)	282/247/177	353/282/212	424/371/318
Dehumidification Rate (l/h)	1.2	1.5	2.3
Sound Level H/M/L (dB(A)+3)	31/26/22	35/28/24	37/34/31
Electrical			
Running Current (A)	0.15	0.15	0.15
Power Supply (fl/V/Hz)	1/208~230/60	1/208~230/60	1/208~230/60
Piping Connections			
Liquid (inches)	1/4	1/4	1/4
Gas (inches)	3/8	3/8	1/2
Drain OD,ID (inches)	4/5, 5/8	4/5, 5/8	4/5, 5/8
Temperature Sensor	Thermistor	Thermistor	Thermistor
Refrigerant	R410A	R410A	R410A
Power/Transmission Interunit Cable (No. x AWG)		4 x 18	4 x 18 4 x 18

Dimensions (WxHxD)

Body (inches)	35 1/4?11 3/32?6 1/2 35 1/4?11 3/32?6 1/2 42 29/32?12?7 3/32
Decorative Panel (inches)	- - -

Net Weight Body (lbs)	20.9	20.9	28.7
Note: Capacities are based on the following conditions:			
Cooling: - Indoor Temperature 80°F (26.7°C) DB/67°F (19.4°C) WB			
- Outdoor Temperature 95°F (35°C) DB/75°F (23.9°C) WB			
Heating: - Indoor Temperature 70°F (21.1°C) DB/60°F (15.6°C) WB			
- Outdoor Temperature 47°F (8.3°C) DB/43°F (6.1°C) WB			
Piping Length: - Interconnecting Piping Length 24.6 ft.(7.5m)			
- Level Difference of Zero			

ART COOL • FLEX MULTI-SPLIT

9,000-18,000 BTUs

- LMAN095HV (H/P Model)
- LMAN125HV (H/P Model)
- LMAN185HV (H/P Model)



FEATURES:

- Changeable front color panel option
- Inverter(Variable speed compressor)
- Chaos Swing
- Jet Cool
- Plasma air purifying system
- Self-cleaning indoor coil
- Auto operation (Artificial Intelligence)
- Auto restart operation
- 24-Hour on/off timer

Interior Unit Includes:

- Wall unit
- Installation plate & hardware
- Wireless LCD remote control, batteries, holder & holder hardware

- Owner's manual
- Standard mirror panel
- ETL# : 3091879

Indoor Model H/P Inverter #	LMAN095HV	LMAN125HV	LMAN185HV
Performance			
Capacity* (BTU/h)	9,000 Class	12,000 Class	18,000 Class
Fan Air Flow Rate (CMM)	8.0/7.0/5.0	10.0/8.0/6.0	12.6/11.5/10
(CFM)	282/247/177	353/282/212	445/406/353
Dehumidification Rate (l/h)	1.2	1.5	2
Sound Level H/M/L (dB(A)+3)	31/26/22	35/28/24	39/37/35
Electrical			
Running Current (A)	0.15	0.15	0.15
Power Supply (fl/V/Hz)	1/208~230/60	1/208~230/60	1/208~230/60
Piping Connections			
Liquid (inches)	1/4	1/4	1/4
Gas (inches)	3/8	3/8	1/2
Drain OD,ID (inches)	4/5, 5/8	4/5, 5/8	4/5, 5/8
Temperature Sensor	Thermistor	Thermistor	Thermistor
Refrigerant	R410A	R410A	R410A
Power/Transmission Interunit Cable (No. x AWG)		4 x 18	4 x 18 4 x 18

Dimensions (WxHxD)

Body (inches)	36?11 3/32?6 1/2 36?11 3/32?6 1/2 43 9/16?12?7 7/8
Decorative Panel (inches)	- - -

Net Weight Body (lbs)	20.9	20.9	31.09
Note: Capacities are based on the following conditions:			
Cooling: - Indoor Temperature 80°F (26.7°C) DB/67°F (19.4°C) WB			
- Outdoor Temperature 95°F (35°C) DB/75°F (23.9°C) WB			
Heating: - Indoor Temperature 70°F (21.1°C) DB/60°F (15.6°C) WB			
- Outdoor Temperature 47°F (8.3°C) DB/43°F (6.1°C) WB			
Piping Length: - Interconnecting Piping Length 24.6 ft.(7.5m)			
- Level Difference of Zero			

CEILING CONCEALED DUCT • FLEX MULTI-SPLIT

9,000-18,000 BTUs

- LMDN095HV (H/P Model)
- LMDN125HV (H/P Model)
- LMDN185HV (H/P Model)



FEATURES:

- Inverter(Variable speed compressor)
- Auto restart operation
- Drain pump
- Control lock function
- Auto operation (Artificial Intelligence)
- 2 thermistor control

Interior Unit Includes:

- Ceiling unit
 - Wired remote control
 - Owner's manual
- ETL# : 3091879

Indoor Model H/P Inverter #	LMDN095HV	LMDN125HV	LMDN185HV
Performance			
Capacity* (BTU/h)	9,000 Class	12,000 Class	18,000 Class
Fan Air Flow Rate (CMM)	8.5/7.5/6.5	9.5/8.5/7.5	15/13.5/11.5
(CFM)	300/265/230	335/300/265	530/477/406
Dehumidification Rate (l/h)	1	1.2	2
Sound Level H/M/L (dB(A)+3)	32/26/25	33/31/26	34/31/29
Electrical			
Running Current (A)	0.25	0.25	0.25
Power Supply (ϕ/V/Hz)	1/208~230/60	1/208~230/60	1/208~230/60
Piping Connections			
Liquid (inches)	1/4	1/4	1/4
Gas (inches)	3/8	3/8	1/2
Drain OD, ID (inches)	1 1/4, 1	1 1/4, 1	1 1/4, 1
Temperature Sensor	Thermistor	Thermistor	Thermistor
Refrigerant	R410A	R410A	R410A
Power/Transmission Interunit Cable (No. x AWG)		4 x 18	4 x 18 4 x 18
Dimensions (WxHxD)			
Body (inches)	32 9/32x7 1/2x 22 21/32	32 9/32x7 1/2x 22 21/32	43 5/16x7 15/32x 22 21/32
Decorative Panel (inches)	-	-	-
Net Weight Body (lbs)	45.2	45.2	58.4

Note:
 1. Capacities are based on the following conditions:
 Cooling: - Indoor Temperature 80°F (26.7°C) DB/67°F (19.4°C) WB
 - Outdoor Temperature 95°F (35°C) DB/75°F (23.9°C) WB
 Heating: - Indoor Temperature 70°F (21.1°C) DB/60°F (15.6°C) WB
 - Outdoor Temperature 47°F (8.3°C) DB/43°F (6.1°C) WB
 Piping Length: - Interconnecting Piping Length 24.6 ft.(7.5m)
 - Level Difference of Zero
 2. Wiring cable size must comply with the applicable local and national code.
 3. The specification may be subject to change without prior notice for purpose of improvement.
 4. For more capacity(*) information, refer to the combination tables.

CEILING CASSETTE • FLEX MULTI-SPLIT

12,000-18,000 BTUs

- LMCN125HV (H/P Model)
- LMCN185HV (H/P Model)

* Cassette Grill sold separately
 Model# : PT-UQC



FEATURES:

- Inverter(Variable speed compressor)
- Auto restart operation
- Drain pump
- Jet Cool
- Plasma air purifying system(Option)
- Control lock function
- Auto operation (Artificial Intelligence)
- 24-Hour on/off timer
- 2 thermistor control

Interior Unit Includes:

- Ceiling unit
- Wireless LCD remote control, batteries, Wireless LCD remote control, batteries, holder & holder hardware
- Owner's manual
- Accessory
- Model name : PT-UQC (Ceiling grill sold separately)
- Model name : PTPKQ0

Indoor Model H/P Inverter #	LMCN125HV	LMCN185HV
Ceiling Grill Model# (Sold Separately)	PT-UQC	PT-UQC
Performance		
Capacity* (BTU/h)	12,000 Class	18,000 Class
Fan Air Flow Rate (CMM)	9.5/8/7	13/12/11
(CFM)	335/282/247	459/424/388
Dehumidification Rate (l/h)	2	2
Sound Level H/M/L (dB(A)+3)	38/35/32	38/37/34
Electrical		
Running Current (A)	0.25	0.25
Power Supply (ϕ/V/Hz)	1/208~230/60	1/208~230/60
Piping Connections		
Liquid (inches)	1/4	1/4
Gas (inches)	3/8	1/2
Drain OD, ID (inches)	1 1/4, 1	1 1/4, 1
Temperature Sensor	Thermistor	Thermistor
Refrigerant	R410A	R410A
Power/Transmission Interunit Cable (No. x AWG)	4 x 18	4 x 18
Dimensions (WxHxD)		
Body (inches)	22 7/16x8 7/16x22 7/16	22 7/16x10x22 7/16
Decorative Panel (inches)	27 6/19x1 3/16x27 6/19	27 6/19x1 3/16x27 6/19
Net Weight Body (lbs)	30.9	33.1
Net Weight Decorative Panel (lbs)	6.6	6.6

Note:
 1. Capacities are based on the following conditions:
 Cooling: - Indoor Temperature 80°F (26.7°C) DB/67°F (19.4°C) WB
 - Outdoor Temperature 95°F (35°C) DB/75°F (23.9°C) WB
 Heating: - Indoor Temperature 70°F (21.1°C) DB/60°F (15.6°C) WB
 - Outdoor Temperature 47°F (8.3°C) DB/43°F (6.1°C) WB
 Piping Length: - Interconnecting Piping Length 24.6 ft.(7.5m)
 - Level Difference of Zero
 2. Wiring cable size must comply with the applicable local and national code.
 3. The specification may be subject to change without prior notice for purpose of improvement.
 4. For more capacity(*) information, refer to the combination tables.

FLEX MULTI-SPLIT • DUAL-, TRI-, & QUAD-ZONE

ELECTRICAL & REFRIGERATION • QUICK REFERENCE

Zone	Type	Model	Electrical Specifications		Running Current	MCA*	MOP**
			Voltage				
			Indoor	Outdoor			
Flex	H/P	LMN095HV	208/230		0.15		
Multi-Split	H/P	LMAN095HV	208/230		0.15		
Indoor Units	H/P	LMDN095HV	208/230		0.25		
	H/P	LMN125HV	208/230		0.15		
	H/P	LMAN125HV	208/230		0.15		
	H/P	LMDN125HV	208/230		0.25		
	H/P	LMCN185HV	208/230		0.25		
	H/P	LMN185HV	208/230		0.15		
	H/P	LMAN185HV	208/230		0.15		
	H/P	LMDN185HV	208/230		0.25		
	H/P	LMCN185HV	208/230		0.25		
	Outdoor Units	H/P	LMU185HV		208/230		12.6
H/P		LMU245HV		208/230		16.4	28.7
H/P		LMU365HV		208/230		19.0	33.3

All equipment are single phase.

NOTE: Please see local electrical codes for proper wire specifications.

*Minimum Circuit Ampacity **Maximum Overcurrent Protection ***For LMU245HV, LMU365HV

Wire Size	
Minimum wiring requirements suggested by manufacturer	
Minimum AWG	14-3
Indoor/Outdoor Connecting Cable	12-3***
Minimum AWG	

Refrigerant Line & Formula Specifications								
Type	Model	Pipe size		Additional Refrigerant	Max. Length Each Pipe	Max. Elevation		
		Liquid	Suction					
Flex	LMN095HV	1/4"	3/8"	0.22 oz./ft.	82'	49'		
Multi-Split	LMAN095HV	1/4"	3/8"	0.22 oz./ft.	82'	49'		
	LMDN095HV	1/4"	3/8"	0.22 oz./ft.	82'	49'		
	LMN125HV	1/4"	3/8"	0.22 oz./ft.	82'	49'		
	LMAN125HV	1/4"	3/8"	0.22 oz./ft.	82'	49'		
	LMDN125HV	1/4"	3/8"	0.22 oz./ft.	82'	49'		
	LMCN125HV	1/4"	3/8"	0.22 oz./ft.	82'	49'		
	LMN185HV	1/4"	1/2"	0.22 oz./ft.	82'	49'		
	LMAN185HV	1/4"	1/2"	0.22 oz./ft.	82'	49'		
	LMDN185HV	1/4"	1/2"	0.22 oz./ft.	82'	49'		
	LMCN185HV							

MULTI-SPLIT SYSTEM

System	Combined With	Norminal Cooling Capacity	EER	SEER	Norminal Heating Capacity	COP	Low Heating Capacity	COP	HSPF
		Btu/h			Btu/h		Btu/h		
LMU185HV	Non-Ducted Indoor Unit	16,000	12.5	15.0	17,600	3.2	12,500	2.4	8.7
	Ducted Indoor Unit	18,000	11.7	15.4	19,000	3.4	13,100	2.5	8.5
	Mixed Ducted & Non-Ducted	17,000	11.9	15.3	18,300	3.3	12,800	2.5	8.6
LMU245HV	Non-Ducted Indoor Unit	21,000	12.5	19.1	28,000	3.2	20,100	2.5	10.3
	Ducted Indoor Unit	22,000	11.5	18.1	28,800	3.3	21,100	2.6	9.8
	Mixed Ducted & Non-Ducted	21,500	11.9	18.6	28,400	3.3	20,600	2.6	10.1
LMU365HV	Non-Ducted Indoor Unit	34,000	9.6	18.5	37,000	2.9	26,100	2.3	9.1
	Ducted Indoor Unit	34,000	9.1	17.6	37,000	3.1	27,400	2.4	9.0
	Mixed Ducted & Non-Ducted	34,000	9.4	18.1	37,000	3.0	26,700	2.3	9.1

Accessory

Wired Wall Thermostat for Flex-Multi Split System
(Applied to Ceiling Concealed Duct, Ceiling Cassette)



PQRCUSA0

FLEX MULTI-SPLIT • COMBINATION OF INDOOR UNIT

LMJ185HV

**Non Ducted Type Indoor Unit
Cooling**

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity				Input(W)			Current(A)			EER	SEER		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Middle	Max	Min			Middle	Max
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	8,000	8,000	-	-	9,600	2.8	16,000	4.7	19,000	5.6	756	1,260	1,720	3.4	5.7	8.5	12.5	15.0
	9	12	-	-	21	6,857	9,143	-	-	9,600	2.8	16,000	4.7	19,000	5.6	780	1,300	1,850	3.6	6.0	9.0	12.5	15.0
	12	12	-	-	24	8,000	8,000	-	-	9,600	2.8	16,000	4.7	19,800	5.8	780	1,300	2,050	3.6	6.0	9.5	12.5	15.0

Heating

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity				Input(W)			Current(A)			COP	HSPF		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Middle	Max	Min			Middle	Max
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	8,800	8,800	-	-	10,560	3.1	17,600	5.2	21,000	6.2	980	1,630	2,000	4.3	7.2	8.8	3.2	8.7
	9	12	-	-	21	8,143	10,857	-	-	11,400	3.4	19,000	5.6	21,300	6.3	1,020	1,700	2,060	4.4	7.4	8.9	3.1	8.5
	12	12	-	-	24	9,500	9,500	-	-	11,400	3.4	19,000	5.6	21,300	6.3	1,100	1,840	2,180	4.9	8.1	9.6	3.2	8.5

**Ducted Type Indoor Unit
Cooling**

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity				Input(W)			Current(A)			EER	SEER		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Middle	Max	Min			Middle	Max
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	9,000	9,000	-	-	10,800	3.2	18,000	5.3	19,000	5.6	790	1,320	1,810	3.6	6.0	7.9	11.7	15.4
	9	12	-	-	21	7,714	10,286	-	-	10,800	3.2	18,000	5.3	19,800	5.8	880	1,460	1,940	3.8	6.5	8.5	11.6	14.6
	12	12	-	-	24	9,000	9,000	-	-	10,800	3.2	18,000	5.3	19,800	5.8	980	1,530	2,150	4.3	7.1	9.0	11.4	14.6

Heating

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity				Input(W)			Current(A)			COP	HSPF		
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Middle	Max	Min			Middle	Max
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	9,500	9,500	-	-	11,400	3.4	19,000	5.6	21,000	6.2	930	1,550	1,900	4.1	6.8	8.4	3.4	8.5
	9	12	-	-	21	8,486	11,314	-	-	11,880	3.5	19,800	5.8	23,000	6.8	970	1,620	1,960	4.2	7.0	8.5	3.2	8.2
	12	12	-	-	24	9,900	9,900	-	-	11,880	3.5	19,800	5.8	23,000	6.8	1,050	1,750	2,070	4.7	7.7	9.1	3.3	8.2



FLEX MULTI-SPLIT • COMBINATION OF INDOOR UNIT

LMJ245HV

Non Ducted Type Indoor Unit

Ducted Type	Indoor Unit					Room Capacity				Min		Total Capacity		Max		Input(W)			Current(A)			EER	SEER	
	INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)				Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	BTU/h	kW	BTU/h	kW	BTU/h	kW	Min	Middle	Max	Min	Middle			Max
		UNIT-A	UNIT-B	UNIT-C	UNIT-D																			
2 INDOOR UNITS	9	9	-	-	18	9,000	9,000	-	-	10,800	3.2	18,000	5.3	19,800	5.8	900	1,500	2,434	4.0	6.7	10.8	11.4	17.5	
	9	12	-	-	21	8,357	11,143	-	-	11,700	3.4	19,500	5.7	21,450	6.3	942	1,570	2,632	4.2	7.0	11.7	11.4	17.5	
	12	12	-	-	24	10,250	10,250	-	-	12,300	3.6	20,500	6.0	28,800	8.5	984	1,640	2,830	4.3	7.2	12.6	11.4	17.5	
	9	18	-	-	27	6,833	13,667	-	-	12,300	3.6	20,500	6.0	31,000	9.1	984	1,640	3,270	4.3	7.2	14.5	11.6	17.9	
	12	18	-	-	30	8,200	12,300	-	-	12,300	3.6	20,500	6.0	31,000	9.1	984	1,640	3,270	4.3	7.2	14.5	11.6	17.9	
3 INDOOR UNITS	9	9	9	-	27	7,000	7,000	7,000	-	12,600	3.7	21,000	6.2	31,000	9.1	1,008	1,680	3,270	4.4	7.4	14.5	12.5	19.1	
	9	9	12	-	30	6,300	6,300	8,400	-	12,600	3.7	21,000	6.2	31,000	9.1	1,008	1,680	3,270	4.4	7.4	14.5	12.5	18.7	
	9	12	12	-	33	5,727	7,636	7,636	-	12,600	3.7	21,000	6.2	31,000	9.1	1,008	1,680	3,270	4.4	7.4	14.5	12.5	18.7	

Heating	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Min		Total Capacity		Max		Input(W)			Current(A)			COP	HSPF	
	INDOOR UNIT	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	BTU/h	kW	BTU/h	kW	BTU/h	kW	Min	Middle	Max	Min	Middle			Max
2 INDOOR UNITS	9	9	-	-	18	10,350	10,350	-	-	12,420	3.7	20,700	6.1	22,770	6.7	1,554	2,590	3,090	6.9	11.4	14.1	2.3	8.5	
	9	12	-	-	21	9,611	12,814	-	-	13,455	4.0	22,425	6.6	26,560	7.8	1,608	2,680	3,100	7.2	12.0	13.9	2.5	8.5	
	12	12	-	-	24	14,000	14,000	-	-	17,280	5.1	28,000	8.5	32,000	9.4	1,716	2,860	3,300	7.5	12.4	14.6	3.0	8.5	
	9	18	-	-	27	9,333	18,667	-	-	17,280	5.1	28,000	8.5	33,000	9.7	1,716	2,860	3,300	7.5	12.4	14.6	3.0	8.7	
	12	18	-	-	30	11,200	16,800	-	-	17,280	5.1	28,000	8.5	33,000	9.7	1,932	3,220	3,500	8.4	14.0	15.5	2.6	8.7	
3 INDOOR UNITS	9	9	9	-	27	9,333	9,333	9,333	-	17,280	5.1	28,000	8.5	33,000	9.7	1,596	2,660	3,300	7.1	11.8	14.6	3.2	10.3	
	9	9	12	-	30	8,400	8,400	11,200	-	17,280	5.1	28,000	8.5	33,000	9.7	1,932	3,220	3,500	8.5	14.2	15.5	2.6	9.5	
	9	12	12	-	33	7,636	10,182	10,182	-	17,280	5.1	28,000	8.5	33,000	9.7	1,932	3,220	3,500	8.5	14.2	15.5	2.6	9.5	

Ducted Type Indoor Unit Cooling	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Min		Total Capacity		Max		Input(W)			Current(A)			EER	SEER	
	INDOOR UNIT	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	BTU/h	kW	BTU/h	kW	BTU/h	kW	Min	Middle	Max	Min	Middle			Max
2 INDOOR UNITS	9	9	-	-	18	9,000	9,000	-	-	10,800	3.2	18,000	5.3	19,800	5.8	950	1,580	2,560	4.2	7.0	11.3	10.8	16.6	
	9	12	-	-	21	8,571	11,429	-	-	12,000	3.5	20,000	5.9	22,000	6.5	990	1,600	2,760	4.4	7.1	12.3	10.8	16.6	
	12	12	-	-	24	10,250	10,250	-	-	12,300	3.6	20,500	6.0	28,800	8.5	1,030	1,670	2,970	4.5	7.4	13.2	10.8	16.6	
	9	18	-	-	27	6,833	13,667	-	-	12,300	3.6	20,500	6.0	31,000	9.1	1,030	1,670	3,430	4.5	7.4	15.2	11.0	17.0	
	12	18	-	-	30	8,200	12,300	-	-	12,300	3.6	20,500	6.0	31,000	9.1	1,030	1,670	3,430	4.5	7.4	15.2	11.0	17.0	
3 INDOOR UNITS	9	9	9	-	27	7,333	7,333	7,333	-	13,200	3.9	22,000	6.5	31,000	9.1	1,060	1,740	3,430	4.7	7.5	15.2	11.5	18.1	
	9	9	12	-	30	6,600	6,600	8,800	-	13,200	3.9	22,000	6.5	31,000	9.1	1,060	1,740	3,430	4.7	7.5	15.2	11.1	17.8	
	9	12	12	-	33	6,000	8,000	8,000	-	13,200	3.9	22,000	6.5	31,000	9.1	1,060	1,740	3,430	4.7	7.5	15.2	11.1	17.8	



FLEX MULTI-SPLIT • COMBINATION OF INDOOR UNIT

**Ducted Type Indoor Unit *continued*
Heating**

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity						Input(W)			Current(A)			COP	HSPF
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Rated	Max	Min	Rated	Max		
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	10,350	10,350	-	-	12,420	3.7	20,700	6.1	22,770	6.7	1,400	2,460	2,940	6.5	10.9	13.4	2.5	8.1
	9	12	-	-	21	9,857	13,143	-	-	13,800	4.1	23,000	6.8	26,560	7.8	1,480	2,550	2,950	6.9	11.4	13.2	2.6	8.1
	12	12	-	-	24	14,400	14,400	-	-	17,280	5.1	28,800	8.5	32,000	9.4	1,530	2,720	3,140	7.1	11.8	13.9	3.1	8.1
	9	18	-	-	27	9,600	19,200	-	-	17,280	5.1	28,800	8.5	33,000	9.7	1,630	2,720	3,140	7.1	11.8	13.9	3.1	8.3
	12	18	-	-	30	11,520	17,280	-	-	17,280	5.1	28,800	8.5	33,000	9.7	1,630	3,060	3,330	8.0	13.3	14.8	2.8	8.3
3 INDOOR UNITS	9	9	9	-	27	9,600	9,600	9,600	-	17,280	5.1	28,800	8.5	33,000	9.7	1,840	2,530	3,140	6.7	11.2	13.9	3.3	9.8
	9	9	12	-	30	8,640	8,640	11,520	-	17,280	5.1	28,800	8.5	33,000	9.7	1,520	3,060	3,330	8.1	13.5	14.8	2.8	9.0
	9	12	12	-	33	7,855	10,473	10,473	-	17,280	5.1	28,800	8.5	33,000	9.7	1,840	3,060	3,330	8.1	13.5	14.8	2.8	9.0

LMU365HV

**Non Ducted Type Indoor Unit
Cooling**

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity						Input(W)			Current(A)			EER	SEER
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Rated	Max	Min	Rated	Max		
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	9,000	9,000	-	-	10,800	3.2	18,000	5.3	19,800	5.8	934	1,556	2,434	4.1	6.9	10.8	11.6	15.1
	9	12	-	-	21	9,000	12,000	-	-	12,600	3.7	21,000	6.2	23,100	6.8	1,025	1,708	2,632	4.4	7.4	11.7	12.3	15.3
	12	12	-	-	24	12,000	12,000	-	-	14,400	4.2	24,000	7.1	26,400	7.8	1,116	1,860	2,830	4.7	7.8	12.5	12.3	15.7
	9	18	-	-	27	9,000	18,000	-	-	16,200	4.8	27,000	7.9	29,700	8.7	1,320	2,200	3,270	5.6	9.3	14.4	12.3	16.4
	12	18	-	-	30	11,600	17,400	-	-	17,400	5.1	29,000	8.5	32,000	9.4	1,578	2,630	3,710	6.5	10.8	16.3	11.0	16.4
	18	18	-	-	36	16,500	16,500	-	-	19,800	5.8	33,000	9.7	35,000	10.3	2,124	3,540	3,920	8.5	14.2	17.3	9.3	16.4
3 INDOOR UNITS	9	9	9	-	27	9,000	9,000	9,000	-	16,200	4.8	27,000	7.9	29,700	8.7	1,320	2,200	3,270	5.6	9.3	14.4	12.3	16.8
	9	9	12	-	30	9,000	9,000	12,000	-	18,000	5.3	30,000	8.8	33,000	9.7	1,578	2,630	3,710	6.5	10.8	16.3	11.4	16.8
	9	12	12	-	33	8,618	11,491	11,491	-	18,960	5.6	31,600	9.3	34,500	10.1	1,812	3,020	3,815	7.5	12.5	16.8	10.5	16.8
	12	12	12	-	36	11,333	11,333	11,333	-	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	16.8
	9	9	18	-	36	8,500	8,500	17,000	-	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	17.0
	9	12	18	-	39	7,846	10,462	15,692	-	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	17.0
	12	12	18	-	42	9,714	9,714	14,571	-	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	17.0
	9	18	18	-	45	6,800	13,600	13,600	-	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	17.5
4 INDOOR UNITS	12	18	18	-	48	8,500	12,750	12,750	-	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	17.5
	9	9	9	9	36	8,500	8,500	8,500	8,500	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	18.5
	9	9	9	12	39	7,846	7,846	7,846	10,462	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	18.5
	9	9	12	12	42	7,286	7,286	9,714	9,714	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	18.5
	9	12	12	12	45	6,800	9,067	9,067	9,067	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	18.5
	9	9	9	18	45	6,800	6,800	6,800	13,600	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	18.5
	12	12	12	12	48	8,500	8,500	8,500	8,500	20,400	6.0	34,000	10.0	36,000	10.6	2,124	3,540	3,920	8.5	14.2	17.3	9.6	18.5



FLEX MULTI-SPLIT • COMBINATION OF INDOOR UNIT

**Non Ducted Type Indoor Unit *continued*
Heating**

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity						Input(W)			Current(A)			COP	HSPF
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Rated	Max	Min	Rated	Max		
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	10,350	10,350	-	-	12,420	3.7	20,700	6.1	22,770	6.7	1,554	2,590	3,090	6.9	11.4	14.1	2.3	8.5
	9	12	-	-	21	10,350	13,800	-	-	14,490	4.3	24,150	7.1	26,560	7.8	1,608	2,680	3,100	7.2	12.0	13.9	2.6	8.5
	12	12	-	-	24	13,800	13,800	-	-	16,560	4.9	27,600	8.1	30,360	8.9	1,662	2,770	3,300	7.5	12.4	13.4	2.9	8.5
	9	18	-	-	27	10,350	20,700	-	-	18,630	5.5	31,050	9.1	34,150	10.0	1,770	2,950	3,500	7.9	13.2	15.7	3.1	8.7
	12	18	-	-	30	13,340	20,010	-	-	20,010	5.9	33,350	9.8	36,680	10.8	1,878	3,130	4,010	8.4	14.0	18.0	3.1	8.7
	18	18	-	-	36	18,975	18,975	-	-	22,770	6.7	37,950	11.2	40,000	11.8	2,166	3,610	4,010	8.4	14.0	18.0	3.1	8.7
3 INDOOR UNITS	9	9	9	-	27	10,350	10,350	10,350	-	18,630	5.5	31,050	9.1	35,700	10.5	1,800	3,000	3,500	8.0	13.4	15.1	3.0	8.9
	9	9	12	-	30	10,350	10,350	13,800	-	20,700	6.1	34,500	10.1	38,640	11.4	1,932	3,220	4,000	8.5	14.2	17.9	3.1	8.9
	9	12	12	-	33	9,911	13,215	13,215	-	21,804	6.4	36,340	10.7	39,820	11.7	2,076	3,460	4,050	9.2	15.3	18.2	3.1	8.9
	12	12	12	-	36	12,333	12,333	12,333	-	22,200	6.5	37,000	10.9	41,000	12.1	2,220	3,700	4,100	9.8	16.3	18.5	2.9	8.9
	9	9	18	-	36	9,250	9,250	18,500	-	22,200	6.5	37,000	10.9	41,000	12.1	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	9	12	18	-	39	8,538	11,385	17,077	-	22,200	6.5	37,000	10.9	41,300	12.1	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	12	12	18	-	42	10,571	10,571	15,857	-	22,200	6.5	37,000	10.9	41,600	12.2	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	9	18	18	-	45	7,400	14,800	14,800	-	22,200	6.5	37,000	10.9	42,000	12.3	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
4 INDOOR UNITS	12	18	18	-	48	9,250	13,875	13,875	-	22,200	6.5	37,000	10.9	42,300	12.4	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	9	9	9	9	36	9,250	9,250	9,250	9,250	22,200	6.5	37,000	10.9	41,000	12.1	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	9	9	9	12	39	8,538	8,538	8,538	11,385	22,200	6.5	37,000	10.9	42,300	12.4	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	9	9	12	12	42	7,929	7,929	10,571	10,571	22,200	6.5	37,000	10.9	41,600	12.2	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	9	12	12	12	45	7,400	9,867	9,867	9,867	22,200	6.5	37,000	10.9	42,000	12.3	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	9	9	9	18	45	7,400	7,400	7,400	14,800	22,200	6.5	37,000	10.9	42,000	12.3	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1
	12	12	12	12	48	9,250	9,250	9,250	9,250	22,200	6.5	37,000	10.9	42,000	12.3	2,220	3,700	4,100	9.8	16.3	18.5	2.9	9.1

**Ducted Type Indoor Unit
Cooling**

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity						Input(W)			Current(A)			EER	SEER
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Rated	Max	Min	Rated	Max		
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	9,000	9,000	-	-	10,800	3.2	18,000	5.3	19,800	5.8	980	1,630	2,560	4.3	7.2	11.3	11.0	14.3
	9	12	-	-	21	9,000	12,000	-	-	12,600	3.7	21,000	6.2	23,100	6.8	1,080	1,790	2,760	4.6	7.7	12.2	11.7	14.5
	12	12	-	-	24	12,000	12,000	-	-	14,400	4.2	24,000	7.1	26,400	7.8	1,170	1,950	2,970	4.9	8.2	13.1	12.3	14.9
	9	18	-	-	27	9,000	18,000	-	-	16,200	4.8	27,000	7.9	29,700	8.7	1,390	2,310	3,430	5.9	9.8	15.1	11.7	15.6
	12	18	-	-	30	11,600	17,400	-	-	17,400	5.1	29,000	8.5	32,000	9.4	1,660	2,760	3,900	6.8	11.3	17.1	10.5	15.6
	18	18	-	-	36	16,500	16,500	-	-	19,800	5.8	33,000	9.7	35,000	10.3	2,230	3,720	4,120	8.9	14.9	18.2	8.9	15.6
3 INDOOR UNITS	9	9	9	-	27	9,000	9,000	9,000	-	16,200	4.8	27,000	7.9	29,700	8.7	1,390	2,310	3,430	5.9	9.8	15.1	11.7	16.0
	9	9	12	-	30	9,000	9,000	12,000	-	18,000	5.3	30,000	8.8	33,000	9.7	1,660	2,760	3,900	6.8	11.3	17.1	10.8	16.0
	9	12	12	-	33	8,618	11,491	11,491	-	18,960	5.6	31,600	9.3	34,500	10.1	1,900	3,170	4,010	7.9	13.1	17.6	9.9	16.0
	12	12	12	-	36	11,333	11,333	11,333	-	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	16.0
	9	9	18	-	36	8,500	8,500	17,000	-	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	16.2
	9	12	18	-	39	7,846	10,462	15,692	-	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	16.2



FLEX MULTI-SPLIT • COMBINATION OF INDOOR UNIT

**Ducted Type Indoor Unit *continued*
Cooling**

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity						Input(W)			Current(A)			EER	SEER
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Rated	Max	Min	Rated	Max		
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
	12	12	18	-	42	9,714	9,714	14,571	-	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	16.2
	9	18	18	-	45	6,800	13,600	13,600	-	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	16.6
	12	18	18	-	48	8,500	12,750	12,750	-	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	16.6
4 INDOOR UNITS	9	9	9	9	36	8,500	8,500	8,500	8,500	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	17.6
	9	9	9	12	39	7,846	7,846	7,846	10,462	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	17.6
	9	9	12	12	42	7,286	7,286	9,714	9,714	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	17.6
	9	12	12	12	45	6,800	9,067	9,067	9,067	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	17.6
	9	9	9	18	45	6,800	6,800	6,800	13,600	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	17.6
	12	12	12	12	48	8,500	8,500	8,500	8,500	20,400	6.0	34,000	10.0	36,000	10.6	2,230	3,720	4,010	8.9	14.9	17.6	9.1	17.6

Heating

INDOOR UNIT	Combination of Indoor Unit (kBTU/h Class)					Room Capacity				Total Capacity						Input(W)			Current(A)		COP	HSPF	
	UNIT-A	UNIT-B	UNIT-C	UNIT-D	Total	UNIT-A (BTU/h)	UNIT-B (BTU/h)	UNIT-C (BTU/h)	UNIT-D (BTU/h)	Min		Middle		Max		Min	Rated	Max	Min	Rated			Max
										BTU/h	kW	BTU/h	kW	BTU/h	kW								
2 INDOOR UNITS	9	9	-	-	18	10,350	10,350	-	-	12,420	3.7	20,700	6.1	22,770	6.7	1,480	2,460	2,940	6.5	10.9	13.4	2.5	8.1
	9	12	-	-	21	10,350	13,800	-	-	14,490	4.3	24,150	7.1	26,560	7.8	1,530	2,550	2,950	6.9	11.4	13.2	2.8	8.1
	12	12	-	-	24	13,800	13,800	-	-	16,560	4.9	27,600	8.1	30,360	8.9	1,580	2,630	3,140	7.1	11.8	12.7	3.1	8.1
	9	18	-	-	27	10,350	20,700	-	-	18,630	5.5	31,050	9.1	34,150	10.0	1,680	2,800	3,330	7.5	12.6	14.9	3.2	8.3
	12	18	-	-	30	13,340	20,010	-	-	20,010	5.9	33,350	9.8	36,680	10.8	1,780	2,970	3,810	8.0	13.3	17.1	3.3	8.3
	18	18	-	-	36	18,975	18,975	-	-	22,770	6.7	37,950	11.2	40,000	11.8	2,060	3,430	3,810	8.0	13.3	17.1	3.2	8.3
3 INDOOR UNITS	9	9	9	-	27	10,350	10,350	10,350	-	18,630	5.5	31,050	9.1	35,700	10.5	1,710	2,850	3,330	7.6	12.7	14.3	3.2	8.5
	9	9	12	-	30	10,350	10,350	13,800	-	20,700	6.1	34,500	10.1	38,640	11.4	1,840	3,060	3,800	8.1	13.5	17.0	3.3	8.5
	9	12	12	-	33	9,911	13,215	13,215	-	21,804	6.4	36,340	10.7	39,820	11.7	1,970	3,290	3,850	8.7	14.5	17.3	3.2	8.5
	12	12	12	-	36	12,333	12,333	12,333	-	22,200	6.5	37,000	10.9	41,000	12.1	2,110	3,520	3,900	9.3	15.5	17.6	3.1	8.5
	9	9	18	-	36	9,250	9,250	18,500	-	22,200	6.5	37,000	10.9	41,000	12.1	2,110	3,520	3,900	9.3	15.5	17.6	3.1	8.6
	9	12	18	-	39	8,538	11,385	17,077	-	22,200	6.5	37,000	10.9	41,300	12.1	2,110	3,520	3,900	9.3	15.5	17.6	3.1	8.6
	12	12	18	-	42	10,571	10,571	15,857	-	22,200	6.5	37,000	10.9	41,600	12.2	2,110	3,520	3,900	9.3	15.5	17.6	3.1	8.6
	9	18	18	-	45	7,400	14,800	14,800	-	22,200	6.5	37,000	10.9	42,000	12.3	2,110	3,520	3,900	9.3	15.5	17.6	3.1	8.9
	12	18	18	-	48	9,250	13,875	13,875	-	22,200	6.5	37,000	10.9	42,300	12.4	2,110	3,520	3,900	9.3	15.5	17.6	3.1	8.9
4 INDOOR UNITS	9	9	9	9	36	9,250	9,250	9,250	9,250	22,200	6.5	37,000	10.9	41,000	12.1	2,110	3,520	3,900	9.3	15.5	17.6	3.1	9.0
	9	9	9	12	39	8,538	8,538	8,538	11,385	22,200	6.5	37,000	10.9	42,300	12.4	2,110	3,520	3,900	9.3	15.5	17.6	3.1	9.0
	9	9	12	12	42	7,929	7,929	10,571	10,571	22,200	6.5	37,000	10.9	41,600	12.2	2,110	3,520	3,900	9.3	15.5	17.6	3.1	9.0
	9	12	12	12	45	7,400	9,867	9,867	9,867	22,200	6.5	37,000	10.9	42,000	12.3	2,110	3,520	3,900	9.3	15.5	17.6	3.1	9.0
	9	9	9	18	45	7,400	7,400	7,400	14,800	22,200	6.5	37,000	10.9	42,000	12.3	2,110	3,520	3,900	9.3	15.5	17.6	3.1	9.0
	12	12	12	12	48	9,250	9,250	9,250	9,250	22,200	6.5	37,000	10.9	42,000	12.3	2,110	3,520	3,900	9.3	15.5	17.6	3.1	9.0





LG
Life's Good

INNOVATIVE COMFORT SOLUTIONS

DUCT-FREE FLOOR STANDING & CEILING CASSETTE AIR CONDITIONING SYSTEMS

High-Capacity Split Systems

The Floor Standing and Ceiling Cassette models are ideal for light commercial applications and work well in large, open spaces. The ceiling cassette is a useful alternative when floor space is limited.


The outdoor unit for both models operate on high-voltage (230/208) power.



Duct-Free Split Floor Standing Indoor Units



Duct-Free Split Ceiling Cassette Indoor Units White Finish

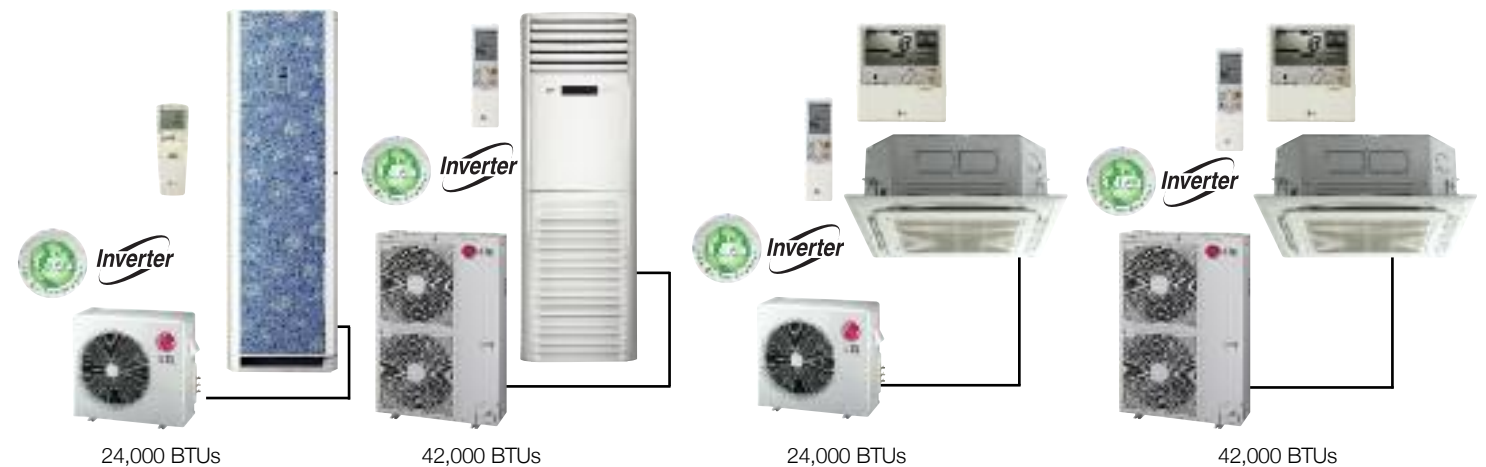

Single Zone Split Systems Floor Standing

Single Zone Split Systems Ceiling Cassette



FLOOR STANDING & CEILING CASSETTE

DUCT-FREE • FLOOR STANDING SINGLE ZONE

24,000 BTUs

- LF245HV** (H/P Model)
- C** 24,000 BTUs Cooling
- H** 26,000 BTUs Heating



42,000 BTUs

- LF425HV** (H/P Model)
- C** 42,000 BTUs Cooling
- H** 44,000 BTUs Heating



FEATURES:

- Inverter (Variable speed compressor)
- R-410a Refrigerant
- Three-dimensional cooling (24k BTUs Only)
- Jet Cool
- Cooling mode
- Dehumidifying mode

- Evaporator frost control
- 7-Hour on/off timer
- Auto restart
- Auto Changeover
- Plasma Air Purifying System (24k BTUs Only)
- Built-in remote control holder
- Temperature display on indoor unit

- Control lock function
- Ultra-quiet turbo fan (24k BTUs Only)
- Gold Fin™ Anti-Corrosion

Exterior Unit Includes:

- Sufficient refrigerant for charging indoor coil and a 25' line set (line set not included)
- ETL# : 3091879

Interior Unit Includes:

- Floor standing unit
- Remote control & batteries

System Model #	LF245HV	LF425HV
Indoor Model #	LFN245HV	LFN425HV
Outdoor Model #	LUU245HV	LUU425HV
Performance	C H	
Capacity (BTUs)	24,000/26,000	42,000/44,000
SEER	13	13
HSPF	7.7	7.7
EER	9.6/10.2	9.0/9.5
Air Circulation (CFM H/M/L)	671/565/459	1,236/1,059/882
Fan Speeds (Cooling/Fan)	3/3	3/3
Dehumidification (pts/hr)		
Indoor dB(A) *	45/42/40	56/53/51
Outdoor dB(A) *	55	58
Electrical		
Rated Voltage Outdoor	230/208-60-1	230/208-60-1
Rated Voltage Indoor	230/208	230/208
Power Input (Cooling/Heating)	2,500/2,550	4,670/4,630
Max Power Input	3,800	5,700
Indoor Dimensions		
W x H x D (inches)	22 4/9 x 12 3/5 x 71 2/3	23 7/32 x 17 5/16 x 71 1/4
Weight (lbs.)	94.8	127.9
Outdoor Dimensions		
W x H x D (inches)	34 1/4 x 12 19/32 x 31 1/2	37 13/32 x 12 31/32 x 54 21/64
Weight (lbs.)	132.3	227.1
Thermostat Range		
Cooling (°F)	64-86	64-86
Heating (°F)	60-86	60-86



DUCT-FREE • CEILING CASSETTE SINGLE ZONE

24,000 BTUs

- LC245HV** (H/P Model)
- C** 24,000 BTUs Cooling
- H** 26,000 BTUs Heating



* Cassette Grill sold separately
Model# : PT-UMC

42,000 BTUs

- LC425HV** (H/P Model)
- C** 42,000 BTUs Cooling
- H** 44,000 BTUs Heating



* Cassette Grill sold separately
Model# : PT-UMC

FEATURES:

- Inverter (Variable speed compressor)
- R-410A Refrigerant
- Internal condensate pump included
- Swirl Wind
- Four-way cooling
- Jet Cool
- Cooling mode
- Dehumidifying mode

- Fan mode
- Independent vane control
- 5 fan speeds
- Evaporator frost control
- 24-Hour on/off timer
- Auto restart
- Auto changeover
- Temperature display on remote
- Ultra-quiet turbo fan
- Gold Fin™ Anti-Corrosion

Interior Unit Includes:

- Ceiling unit
- Wired control & wireless remote control with batteries
- Installation manual
- Accessory
- Model name : PT-UMC (Ceiling grill sold separately)

- Model name : PTPKM0 (Plasma kit sold separately)

System Model #	LC245HV	LC425HV
Indoor Model #	LCN245HV	LCN425HV
Outdoor Model #	LUU245HV	LUU425HV
Ceiling Grill Model# (Sold Separately)	PT-UMC	PT-UMC
Performance	C H	
Capacity (BTUs)	24,000/26,000	42,000/44,000
SEER	14	14
HSPF	7.7	7.7
EER	10.0/10.4	9.9/10.2
Air Circulation (CFM H/M/L)	636/565/494	1,200/1,130/1,060
Fan Speeds (Cooling/Fan)	5/4	5/4
Dehumidification (pts/hr)	2.1	3.6
Indoor dB(A) *	39/37/34	46/44/40
Outdoor dB(A) *	55	58
Electrical		
Rated Voltage Outdoor	230/208-60-1	230/208-60-1
Rated Voltage Indoor	230/208	230/208
Power Input (Cooling/Heating)	2,400/2,500	4,240/4,310
Max Power Input	3,800	5,700
Indoor Dimensions		
W x H x D (inches)	33 5/64 x 12 19/32 x 8 1/32	33 5/64 x 11 1/3
Weight (lbs.)	46.3	57.3
Outdoor Dimensions		
W x H x D (inches)	34 1/4 x 12 19/32 x 31 1/2	37 13/32 x 12 31/32 x 54 21/64
Weight (lbs.)	132.3	227.1
Thermostat Range		
Cooling (°F)	64-86	64-86
Heating (°F)	60-86	60-86



DUCT-FREE • FLOOR STANDING & CEILING CASSETTE • SINGLE ZONE

ELECTRICAL & REFRIGERATION • QUICK REFERENCE

Electrical Specifications†							
Type	System #	BTUs	Indoor	Outdoor	Rated Amps	MCA*	MOP**
Floor Standing H/P	LF245HV	24,000	230/208		11.5/11.	20	30
Floor Standing C/H	LF425HV	0	230/208		5	30	40
Ceiling Cassette H/P	LC245HV	24,000	230/208		20.0/20.	20	30
Ceiling Cassette C/H	LC425HV	0	230/208			30	40

All equipment single phase.

*Minimum Circuit Ampacity
**Maximum Overcurrent Protection

NOTE: Please see local electrical codes for proper wire specifications.

Wire Size	
Minimum wiring requirements suggested by manufacturer.	
Minimum AWG	14-3
Indoor/Outdoor Connecting Cable Minimum AWG	14-3

Refrigerant Line Specifications†						
Type	System #	BTUs	Pipe size Liquid Suction	Additional Refrigerant	Max. length each pipe	Max. elevation
Floor Standing H/P	LF245HV	24,000	3/8" 5/8"	0.32	100'	66'
Floor Standing C/H	LF425HV	42,000	3/8" 5/8"	oz./ft.	131'	82'
Ceiling Cassette H/P	LC245HV	24,000	3/8" 5/8"	0.42	100'	50'
Ceiling Cassette C/H	LC425HV	42,000	3/8" 5/8"		115'	66'

†Each system is pre-charged with enough refrigerant to charge of line and the interior unit.

NOTE: Systems having the outdoor unit mounted above the indoor unit (e.g. basement installations) have the following additional requirement:

For systems with maximum elevation of 25 ft. (see chart and Figure A), refrigerant lines must be oil trapped between 8' and 16.4' of elevation.

For systems with elevation of greater than 25 ft. (see chart), refrigerant lines must be oil trapped at least every 16.4' elevation.

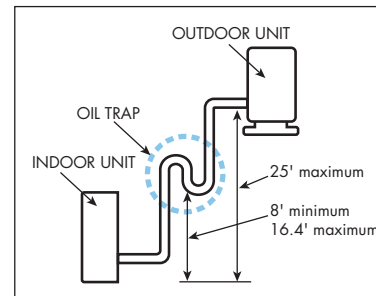


Figure A. Example: 25 ft. maximum elevation.

PACKAGED TERMINAL AIR CONDITIONERS

Ultra-quiet operation is the hallmark of LG's new line of PTAC products. Low decibel levels and an outstanding sound-prevention rating make this your best choice for a quiet environment. And with efficiency ratings up to 12.5 EER, these units are also your energy efficient choice.

Other features include standard connections for remote thermostat and front desk controls. Gold Fin™ technology protects the unit from the corrosive effects of outside air and extends the operating life of PTAC models. And the industry standard size makes installation easy and economical.



7,000-15,000 BTUs



Digital Control Panel



Wireless Digital Thermostat



PACKAGED TERMINAL AIR CONDITIONERS

PTAC Features & Benefits



Digital Control Display Includes:

- **Temperature Display on Unit**
Precise and easy to use. **ADA compliant.**
- **Cooling, Heating and Fan Modes**
One unit for all seasons.
- **Energy Saver Mode**
Helps to lower energy consumption operational costs and saves money.
- **Auto Restart**
Automatically restarts to programmed setting when

Ventilation Filter

Polymeric mesh filter allows clean, fresh air into the living space. Ideal for Health Care applications.

Separate Indoor & Outdoor Motors*

Dual motor configuration allows the lowest sound rating in the industry while also promoting the highest level of energy efficiency.

Defrost Control

(Heat Pump Models Only) Shuts down the indoor fan to prevent cold air from being blown into the room. Also removes frost from outdoor coil when the outdoor temperature is low.

Sensors*

4 Sensors provide highly efficient operation and maximize guest comfort.

Emergency Heat

(Heat Pump Models Only) Bypasses compressor operation and activates the ceramic or coil heater during periods of extreme cold. Promotes

Freeze Room Protection

Electronic temperature controls constantly monitor and maintain indoor temperature to

Power Cord
Included with

High-Efficiency Rotary Compressor

Energy efficient and maintenance-free operation.

*Digital Control Models Only



Wireless Energy Management Digital Thermostat with occupancy sensor:

- ¥ Digital touch-screen controls
- ¥ Built-in occupancy sensor
- ¥ Built-in energy management controls
- ¥ True wireless rf communication



Wireless Energy Management Digital Thermostat Control Board (included in Wireless Wall Thermostat kit)

Snaps directly on to PTAC control board —



Gold Fin™ Anti-Corrosion

Protects the unit from the corrosive effects of outside air and extends the operating life of PTAC models. LG's patented process is standard on **ALL** LG PTAC models.*



Ceramic Heater

Even, stable and safe heating platform.

PACKAGED TERMINAL AIR CONDITIONERS

7,000-15,000 BTUs Digital Control

- C** **LP070CED-Y8** (H/C Model) 7,600 BTUs Cooling & Heating
- C** **LP090CED-Y8** (H/C Model) 9,000 BTUs Cooling & Heating
- C** **LP120CED-Y8** (H/C Model) 11,800 BTUs Cooling & Heating
- C** **LP150CED-Y8** (H/C Model) 12,000 BTUs Cooling & Heating
- C** **LP070HED-Y8** (Heat Pump Model) 7,600 BTUs Cooling & Heating
- C** **LP090HED-Y8** (Heat Pump Model) 9,000 BTUs Cooling & Heating
- C** **LP120HED-Y8** (Heat Pump Model) 11,800 BTUs Cooling & Heating
- C** **LP124HED-Y8** (Heat Pump Model) 12,000 BTUs Cooling & Heating



FEATURES:

- | | | | |
|--|--|---|--|
| <ul style="list-style-type: none"> • Gold Fin™ anti-corrosion treatment • Cooling mode • Heating mode • Fan mode | <ul style="list-style-type: none"> • Energy saver mode • Auto restart • Digital temperature control • Front desk control connection • Dip switch settings | <ul style="list-style-type: none"> • Evaporator frost control • Temperature display on unit • Freeze room protection | <p>System Includes:</p> <ul style="list-style-type: none"> • Wall unit • Installation manual MEA# : 24-08-E UL# : SA13362 |
|--|--|---|--|



System Model #	LP070CED-Y8	LP090CED-Y8	LP120CED-Y8	LP150CED-Y8	LP070HED-Y8	LP090HED-Y8	LP120HED-Y8	LP124HED	LP150HED-Y8
Control Type	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital
Performance									
Capacity (BTU/h)	7,600/7,400/12,000/11,800	9,000/8,800/14,300/14,100	11,800/11,500/14,300/14,100		14,300/14,100		7,600/7,400/12,000/11,800		14,300/14,100
EER	12.5	11.7	11.2	10.0	12.1	11.6	10.8	10.8	9.8
Air Circulation (CFM H/L)	335/300	335/300	390/355	390/355	335/300	335/300	390/355	390/355	390/355
Fan Speeds (Cooling/Heating/Fan)	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2
Dehumidification (pts/hr)	2.0	2.6	3.3	4.4	2.0	2.6	3.3	3.3	4.4
Indoor dB(A) *	45/43	45/43	49/47	49/47	45/43	45/43	49/47	49/47	49/47
Outdoor dB(A) *	60/58	60/58	63/61	63/61	60/58	60/58	63/61	63/61	63/61
STC	30	30	30	30	30	30	30	30	30
Electrical									
Rated Voltage	230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1	230/208-60-1
Electric Heater (kW)	2.5	3.5	3.5	3.5	2.5	3.5	3.5	3.5	3.5
Circuit Breaker (A)	15	20	20	20	15	20	20	20	20
Dimensions									
W x H x D (inches)	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8
Weight (lbs.)	86.4	86.6	92.6	100.5	90.8	91.1	97.1	97.1	106.5



PACKAGED TERMINAL AIR CONDITIONERS

7,000-15,000 BTUs Digital Control

- C** **LP070CED1** (H/C Model) 7,600 BTUs Cooling & Heating
- C** **LP090CED1** (H/C Model) 8,900 BTUs Cooling & Heating
- C** **LP120CED1** (H/C Model) 11,800 BTUs Cooling & Heating
- C** **LP150CED1** (H/C Model) 14,000 BTUs Cooling & Heating
- C** **LP070HED1** (Heat Pump Model) 7,300 BTUs Cooling & Heating
- C** **LP090HED1** (Heat Pump Model) 9,300 BTUs Cooling & Heating
- C** **LP120HED1** (Heat Pump Model) 12,000 BTUs Cooling & Heating
- C** **LP150HED1** (Heat Pump Model) 14,400 BTUs Cooling & Heating
- C** **LP155HED1** (Heat Pump Model) 14,400 BTUs Cooling & Heating



FEATURES:

- | | | | |
|--|--|---|--|
| <ul style="list-style-type: none"> • Gold Fin™ anti-corrosion treatment • Cooling mode • Heating mode • Fan mode | <ul style="list-style-type: none"> • Energy saver mode • Auto restart • Digital temperature control • Front desk control connection • Dip switch settings | <ul style="list-style-type: none"> • Evaporator frost control • Temperature display on unit • Freeze room protection | <p>System Includes:</p> <ul style="list-style-type: none"> • Wall unit • Installation manual MEA# : 24-08-E UL# : SA13362 |
|--|--|---|--|


System Model #	LP070CED1	LP090CED1	LP120CED1	LP150CED1	LP155CED1	LP070HED1	LP090HED1	LP120HED1	LP150HED1	LP155HED1
Control Type	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital	Digital
Performance										
Capacity (BTU/h)	7,600	8,900	11,800	14,000	14,000	7,300	9,300	12,000	14,400	14,400
EER	11.7	11.0	10.7	9.5	9.5	11.6	11.2	10.4	9.2	9.2
Air Circulation (CFM H/L)	300/270	300/270	420/390	420/390	420/390	300/270	300/270	420/390	420/390	420/390
Fan Speeds (Cooling/Heating/Fan)	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2	2/2/2
Dehumidification (pts/hr)	2.0	2.6	3.3	4.4	4.4	2.0	2.6	3.3	4.4	4.4
Indoor dB(A) *	45/43	45/43	49/47	49/47	49/47	45/43	45/43	49/47	49/47	49/47
Outdoor dB(A) *	60/58	60/58	63/61	63/61	63/61	60/58	60/58	63/61	63/61	63/61
STC	30	30	30	30	30	30	30	30	30	30
Electrical										
Rated Voltage	265-60-1	265-60-1	265-60-1	265-60-1	265-60-1	265-60-1	265-60-1	265-60-1	265-60-1	265-60-1
Electric Heater (kW)	3.7	3.7	3.7	5.0	2.0	3.7	3.7	3.7	3.7	5.0
Circuit Breaker (A)	20	20	20	30	15	20	20	20	20	30
Dimensions										
W x H x D (inches)	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8	42 x 16 x 19 7/8
Weight (lbs.)	87.7	86.6	93.7	102.1	102.1	90.8	92.2	99.2	106.5	106.5
Thermostat Range										
Cooling/Heating (°F)	54-86/54-86	54-86/54-86	54-86/54-86	54-86/54-86	54-86/54-86	54-86/54-86	54-86/54-86	54-86/54-86	54-86/54-86	54-86/54-86



WIRELESS ENERGY MANAGEMENT DIGITAL THERMOSTAT



Touch screen-operated design with intuitive graphic user interface




Occupancy Sensor automatically turns off the air conditioner when the room is unoccupied



Wireless Energy Management Digital Thermostat Control Board: Snaps directly on to PTAC control board – no tools required.

Dimensions:
Case: 5 3/4"W x 4 3/4"H x 1 1/4"D
LCD Screen: 3 5/8"W x 2 1/8"H

Part Numbers:
LG PTAC Wireless Wall Thermostat Kit:
Part # PYRCUCC0A
LG Mini-Split Wireless Wall Thermostat Kit:
Part # DFSWLWT0A
Applicable to 36V DC indoor models (Single Zone) only



Monitor power use and calculate cost of operation



Pre-program up to 4 temperature and fan operation mode changes daily

This innovative thermostat provides a great way to control spiralling energy costs while ensuring perfect comfort. It combines the energy-saving convenience of complete programmability and temperature control for both occupied and unoccupied rooms. Its unique “occupancy sensor” automatically turns off the air conditioner when a room is unoccupied, further reducing wasted energy. And with its intuitive touch screen interface, it’s easy to not only adjust temperature, but air flow as well.

THERMOSTAT FEATURES

- **Ener gy-savi ng “Occupancy Sensor”** automatically turns off the air conditioner when the room is unoccupied.
- **Pr ogrammabl e Occupied and Unoccupi ed Temper at ure Setti ng** allows for high and low occupied/unoccupied setting for further energy savings.
- **Hi gh-vi si bi li ty, backlit touchscreen** with a scratch-resistant, easy-to-clean surface.
- **I ntui ti ve graphi cal user i nt erf ace** with descriptive buttons.
- **“No manual needed”** simplified operation and programming.
- **Conveni ent “Clean Screen”** command prevents accidental change in settings while cleaning display.
- **Adj ustabl e contrast** with white-on-black or black-on-white display.

INSTALLATION FEATURES

- **Syst em Conf i gur at i on M enu** allows selection of either “Heat Pump” or “Air Conditioner” compressor type for optimum system integration and performance.
- **Advanced Setti ngs M enu** allows pre-programming the fan speeds for maximum comfort and energy efficiency.

LG DUCT-FREE SPLIT SYSTEMS Applicable to 36V DC indoor models(Single Zone) only

ADDITIONAL COMFORT AND CONTROL FEATURES

- **Ver sat i le 7-day, 4- event s-per - day pr ogr am** with a selectable temperature set point and fan mode for each event.
- **Conveni ent “Copy” opt i on** duplicates daily settings to simplify the set-up of a custom, 7-day program.
- **“Fi lter Mni tor”** ensures that airflow is maximized by notifying the user to clean the air filter at regular intervals.
- **“Ener gy Wat ch”** monitors power consumption (kWh) and calculates the actual dollar cost of operating the LG Mini-Split Air Conditioner over a selected time period.

Applicable to 36V DC indoor models only.



Description	Model #	Description	Model #	Description	Model #
42" Wall Sleeve	AYSVB01A	Wired Wall Thermostat	PYRCUCA0A	Condensate Disposal Kit	230A/208V AYCD2101
42" Stamped Aluminum Rear Architecture Grille - Aluminum	AYRGALA01	Wall Thermostat Connection Kit	AYWH101	Condensate Drain Kit	AYDR101
Architecture Grille - Dark Bronze	AYGALB01A	EMS/Front Desk Control Connection Kit	AYFD101	Lateral Duct Kit	AYLD1A
Architecture Grille - Soft Dove	AYGALC01A	Sub Base 20A 230/208V	AYSB1101A	Leveling Legs	AYLL101
Wireless Wall Thermostat Adapter Kit of Wireless Wall Thermostat for GE PTAC	PYADTGE1A	Sub Base 30A 230/208V	AYSB2101A	Control Panel Key Lock	AYCP101
Adapter Kit of Wireless Wall Thermostat for Amana PTAC	PYADTAM1A	Sub Base 20A 265V	AYSB3101A	Remote Escutcheon Kit - 10 Pack	AYRE110
		Sub Base 30A 265V	AYSB4101A	Replacement Filter - 10 Pack	AYFT110
		Fuse Holder Kit (230V, 30A)	AYFH1401		
		Hard Wire Kit	AYHW101		
				Hydronic/Steam Coil Kit 230/208V/265V	PYHSK1A
				Hydronic Valve 230/208V NC 1/2"	PYHV1A
				Hydronic Valve 265V NC 1/2"	PYHV2A
				Steam Valve 230/208V NC 1/2"	PYSV1A
				Steam Valve 265V NC 1/2"	PYSV2A



42" Wall Sleeve
AYSVB01A



42" Stamped Aluminum Grille
AYRGALA01



Architecture Grille - Aluminum
AYAGALA01A



Architecture Grille - Dark Bronze
AYGALB01A



Architecture Grille - Soft Dove
AYGALC01A



Wireless Energy Management Digital Thermostat with Occupancy Sensor
PYRCUCC0A
For technical support, call 866-908-6824, press #2



Digital Wired Wall Thermostat
PYRCUCA0A



EMS/Front Desk Control Connection Kit
AYFD101



Fuse Holder Kit
AYFH1401



Hardwire Kit
AYHW101



Condensate Disposal Kit
AYCD2101



Condensate Drain Kit
AYDR101



PACKAGED TERMINAL AIR CONDITIONERS

PARTS & ACCESSORIES




CFM	Heat ing BTUs	
	Hydr onic	St eam
270	14,500	18,500
300	15,500	19,500
335	16,500	21,000
355	17,000	21,500
390	17,500	22,000
420	18,500	23,500

Based on ARI test condition of 70...F DB / 60...F WB, 200...F EWT, 20...F DT, 70...F EAT, 2 psig steam, 70...F



Installation • Quick Reference

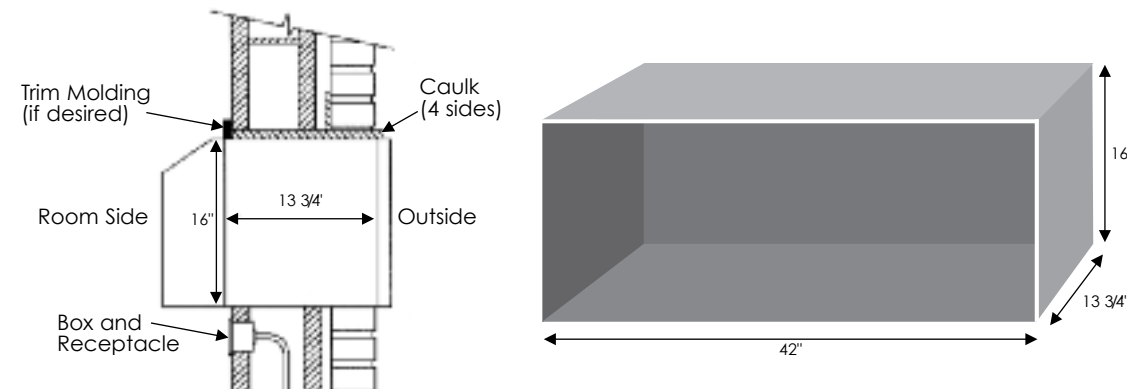

THROUGH-THE-WALL AIR CONDITIONERS

THROUGH-THE-WALL AIR CONDITIONERS

LG's Through-The-Wall models offer versatile, energy efficient solutions for residential and light commercial applications.

Some of LG's Through-The-Wall models are ENERGY STAR® qualified, an important feature for energy conscious customers. All feature Gold Fin™ Technology which protects the unit from the corrosive effects of the salt air and extend the operating life.

BTU sizes range from 8,000–14,000, and both cooling only and heat/cool models are offered. Also, the standard size chassis fits into any competitive wall sleeve, allowing for an easy upgrade for an existing system.

TTW Features & Benefits

Gold Fin™ Anti-Corrosion

Protects the unit from the corrosive effects of outside air and extends the operating life of TTW models.

Push Button Shift Mode

Allows you to switch between cool and heat with ease.

12 Hour On/Off Timer

Allows you to set the number of hours you'd like the unit to run, up to 12 Hours.

Auto Sleep Mode

Automatically increases the temperature setting 2° F twice (after 1/2 hour and one hour). The interior unit shuts off when the timer setting is reached.

Auto Restart

Automatically restarts a unit to programmed setting when the electricity comes on after a power failure.



Trim Kit

Unit has a nice, finished look when placed into an existing wall sleeve.



THROUGH-THE-WALL AIR CONDITIONERS

8,000-14,000 BTUs

- LT0810CR** (A/C Model) 8,000 BTUs Cooling
- LT1010CR** (A/C Model) 9,800 BTUs Cooling
- LT1030CR** (A/C Model) 10,000 BTUs Cooling
- LT1210CR** (A/C Model) 11,500 BTUs Cooling
- LT1230CR** (A/C Model) 11,500 BTUs Cooling
- LT1430CR** (A/C Model) 13,000 BTUs Cooling



FEATURES:

- Gold Fin™ anti-corrosion treatment
- Cooling mode
- Fan mode
- Auto sleep mode
- Auto restart
- 12-Hour on/off timer
- System Includes:**
 - Wall unit
 - Remote control and batteries
 - Installation manual
 - Trim Kit
- UL# : SA7244

System Model #	LT0810CR	LT1010CR	LT1030CR	LT1210CR	LT1230CR	LT1430CR
Performance						
Capacity (BTUs)	8,000	9,800	10,000/9,800		11,500	
		13,000/12,600				
EER	9.6	8.8	9.4/9.4	8.8	8.8/8.8	8.5/8.5
Energy Star						
Air Circulation (CFM H/L)		260/220	285/225	285/225	290/230	290/230
						310/250
Fan Speeds (Cooling/Fan)		3/3	3/3	3/3	3/3	3/3 3/3
Dehumidification (pts/hr)		2.2	3.2	3.2	3.8	3.8 4.0
Indoor dB(A) *	49/46	51/48	51/48	52/49	52/49	53/50
Outdoor dB(A) *	59	60	60	61	61	62
Electrical						
Rated Voltage	115-60-1	115-60-1	230/208-60-1		115-60-1	230/208-60-1
		230/208-60-1				
Circuit Breaker (A)	15	15	15	15	15	15
Dimensions						
W x H x D (inches)	14 x 14	14 x 24	14 x 24	14 x 24	14 x 24	14 x 24
		13/32 x 14	13/32 x 14	13/32 x 14	13/32 x 14	13/32 x 14
		3/32 x 20	3/32 x 20	3/32 x 20	3/32 x 20	3/32 x 20

THROUGH-THE-WALL AIR CONDITIONERS

10,000-12,000 BTUs

- LT1030HR** (H/C Model) 10,000 BTUs Cooling & Heating
- LT1230HR** (H/C Model) 11,500 BTUs Cooling & Heating



FEATURES:

- Gold Fin™ anti-corrosion treatment
- Cooling mode
- Heating mode
- Fan mode
- Auto sleep mode
- Auto restart
- 12-Hour on/off timer
- System Includes:**
 - Wall unit
 - Remote control and batteries
 - Installation manual
 - Trim Kit
- UL# : SA7244

System Model #	LT1030HR	LT1230HR
Performance		
Capacity (BTUs)	10,000/9,800	11,500/11,200
	11,200/9,200	11,200/9,200
EER	9.4/9.4	8.8/8.8
Air Circulation (CFM H/L)	285/225	290/230
Fan Speeds(Cooling/Heating/Fan)	2/2/2	2/2/2
Dehumidification (pts/hr)	3.2	3.8
Indoor dB(A) *	51/48	52/49
Outdoor dB(A) *	60	61
Electrical		
Rated Voltage	230/208-60-1	230/208-60-1
Circuit Breaker (A)	20	20
Dimensions		
W x H x D (inches)	24 21/32 x 14 13/32 x 19 21/32	24 21/32 x 14 13/32 x 19 21/32
Weight (lbs.)	78.0	80.0
Thermostat Range		
Cooling/Heating (°F)	60-86/54-86	60-86/54-86

*LG verified sound rating

THROUGH-THE-WALL AIR CONDITIONERS OPTIONAL ACCESSORIES

Description	Model #
26" Wall Sleeve	AXSVA1
Stamped Aluminum Grille	AXRGALA01
Wall Sleeve with Stamped Aluminum Grille	AXSVA4
Architectural Grille	



Wall Sleeve
AXSVA1



Stamped Aluminum Grille
AXRGALA01



Wall Sleeve with Stamped
Aluminum Grille
AXSVA4



Architectural Grille
AXAGALA01A
Available in aluminum,
dark bronze and soft dove.
Please contact WMF at
636.583.1600
for more information

Sleeve Dimensions	Friedrich	GE	Amana	Whirlpool	Frigidaire	LG
Major Brands (incl. USC Sleeve)				Fedders		
Height	15 17/32	15 5/8	15 5/8	15 3/4	15 7/16	15 17/32
Width	25 7/8	26	26	26 3/4	25 7/8	25 7/8
Depth	16 23/32	16 7/8	16 7/8	15	18	16 23/32

Inside dimension of LG Sleeve (W x H x D, inches): 25 5/16 x 14 7/8 x 15 5/16

WINDOW AIR CONDITIONERS 7,000-24,000 BTUs

- C H** LWHD7000HR (H/C Model)
7,000 BTUs Cooling & Heating
- LWHD1200HR** (H/C Model)
12,000 BTUs Cooling & Heating
- LWHD1800HR** (H/C Model)
18,000 BTUs Cooling & Heating
- LWHD2400HR** (H/C Model)
24,000 BTUs Cooling & Heating



FEATURES:

- Cooling mode
- Heating mode
- Fan mode
- Auto sleep mode
- Auto restart
- 12-Hour on/off timer

System Includes:

- Window unit
 - Remote control and batteries
 - Installation manual
- UL SA7244**

System Model #	LWHD7000HR	LWHD1200HR	LWHD1807HR	LWHD2400HR
Performance				
Capacity (BTUs)	C 7,000 H 3,850	12,000/11,500	18,000/17,500	25,000/23,000
EER	9.7	9.8/9.8	9.7/9.7	8.5/8.5
Air Circulation (CFM)	205	265	430	560
Fan Speeds(Cooling/Heating/Fan)		2/2/2	2/2/2	2/2/2
Dehumidification (pts/hr)	2.3	3.3	5.5	6.5
Indoor dB(A) *	49	51	55	64
Outdoor dB(A) *	54	57	63	69

Electrical	LWHD7000HR	LWHD1200HR	LWHD1807HR	LWHD2400HR
Rated Voltage	115-60-1	230/208-60-1	230/208-60-1	230/208-60-1
Circuit Breaker (A)	20	20	20	20
Dimensions				
W x H x D (inches)	18 9/16 x 13 7/8 x 20 11/16	23 5/8 x 14 31/32 x 22 1/16	26 x 16 27/32 x 30 5/16 x	26 x 16 27/32 x 30 5/16 x
Weight (lbs.)	60.0	87.0	136.0	146.0

Thermostat Range	LWHD7000HR	LWHD1200HR	LWHD1807HR	LWHD2400HR
Cooling/Heating (°F)	60-86	60-86	60-86	60-86

*LG verified sound rating