





**HVAC** installation  
SOLUTIONS

# PRO-Fit™ Quick Connect Push-to-Connect Refrigerant Fittings

- Easy Push-in
- No Flaring or Brazing Needed
- Quick Release Removal
- Airtight Seal with Double O-Rings
- Compatible with Major Refrigerants

Push-to-connect  
refrigerant lines in seconds

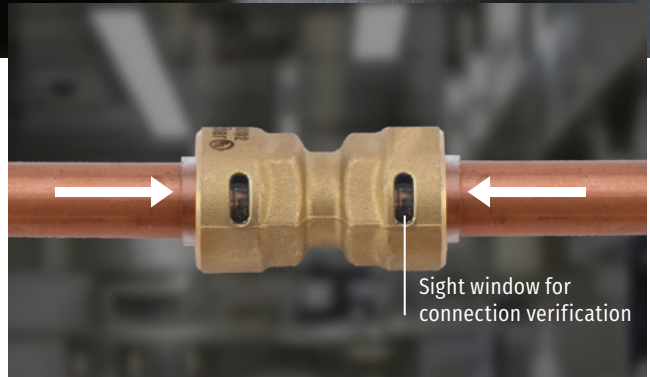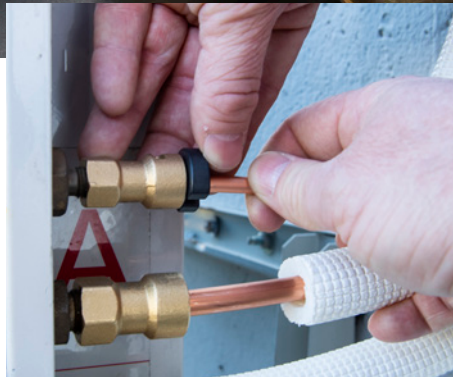



## Push-to-Connect Refrigerant Fittings

**NOTE:** The units are individually sealed to allow for resale by a distributor

Code	Description	Qty
87018	1/4" Union	10
87019	3/8" Union	10
87020	1/2" Union	10
87021	5/8" Union	10
87022	3/4" Union	10
87023	7/8" Union	10
87024	1/4" Elbow	10
87025	3/8" Elbow	10
87026	1/2" Elbow	10
87027	5/8" Elbow	10
87028	3/4" Elbow	10
87029	7/8" Elbow	10
87030	1/4" to 3/8" Reducer	10
87031	3/8" to 1/2" Reducer	10
87032	1/2" to 5/8" Reducer	10
87033	1/4" to 3/8" Elbow Reducer	10
87034	3/8" to 1/2" Elbow Reducer	10
87035	1/2" to 5/8" Elbow Reducer	10
87036	1/4" Socket	10
87037	3/8" Socket	10
87038	1/2" Socket	10
87039	5/8" Socket	10
87042	1/4" Valve	5
87043	3/8" Valve	5
87044	1/2" Valve	5
87045	5/8" Valve	5
87048	1/4" - 5/8" Support Kit Line Marking Tool & Disconnect Clips	10
87049	3/4" - 7/8" Support Kit Line Marking & Disconnect Tools	10

**Application** • Flame-free fittings for connecting refrigerant lines • For HVAC/R up to 870 psi (60 bar) • Prevent refrigerant lineset leaks

**Recommended for** • Residential use • Copper & aluminum linesets • Mini-split HVAC units • Unitary indoor coils



Unions



Elbows



Reducers



Sockets



Valves



Support Kits



### FEATURES

- Quick and easy push-in
- Flame-free: no flaring or brazing needed
- Single-use with quick-release removal
- Robust brass body, durable & reliable
- Leak-proof double o-rings sealing
- Complete system with all sizes and configurations
- High tensile strength
- Vibration and impact resistant
- UV resistant
- Corrosion resistant
- Sight window for connection verification
- Compatible with major refrigerants

**RectorSeal® 2601 Spenwick Drive - Houston, TX 77055 800-231-3345 rectorseal.com**

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensor's and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice.

©2020 RectorSeal. All rights reserved. R50112-0420